
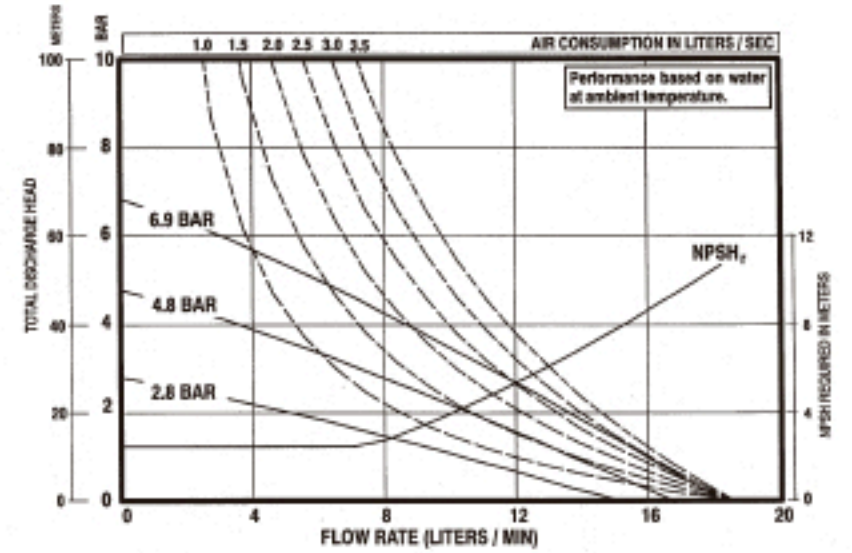
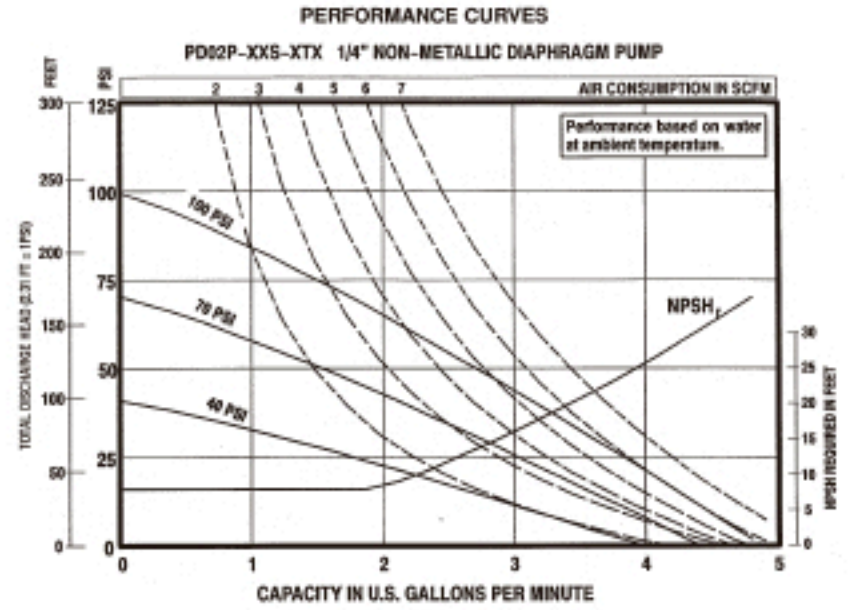


# Performance Specifications

<b>RATIO:</b>	1:1
<b>MAXIMUM G.P.M. (Liters):</b>	4.6 (17.4)
<b>DISPLACEMENT GALLONS (Liters) PER CYCLE:</b>	.014 (.053)
<b>AIR INLET:</b>	1/4" (F)
<b>FLUID INLET:</b>	3/8" (F)
<b>FLUID OUTLET:</b>	1/4" (F)
<b>MAX. OPERATING PRESSURE PSI (bar):</b>	100 (6.8)
<b>SUSPENDED SOLIDS MAX. DIA. IN. (mm):</b>	Clean Fluid Only
<b>WEIGHT - LBS. (KGS):</b>	4.1 (1.85) Poly, 4.6 (2.10) Acetal, 4.9 (2.2) Kynar
<b>MAX. DRY SUCTION LIFT:</b>	20 ft.

# Dimensional Data

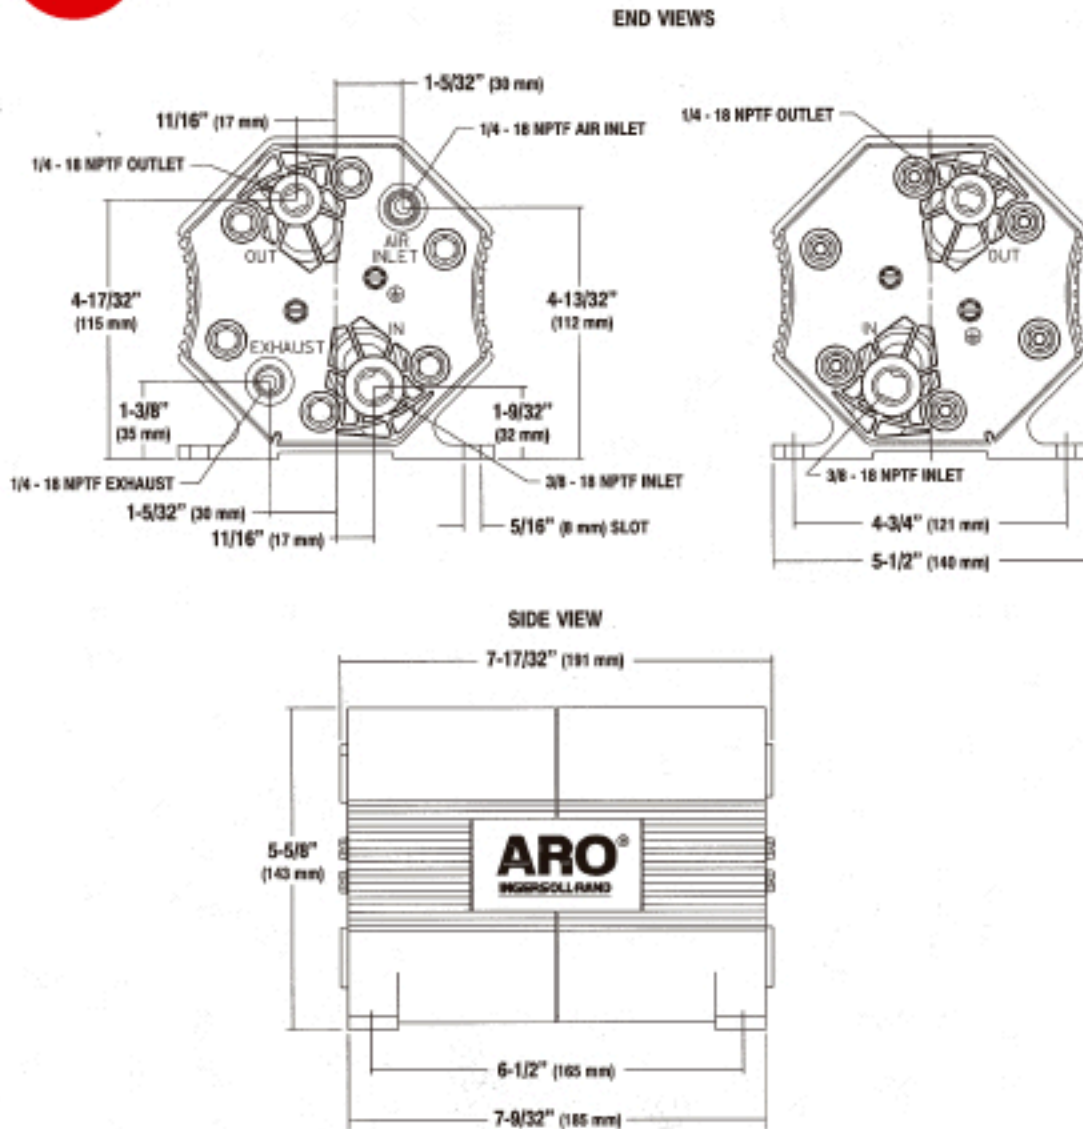

# Accessories

## Recommended Filter/Regulator (See Page 36)

**Filter / Regulator: P29122-600**

For complete airline connection kit, see page 32, item "B". Pulsation Dampener, see page 24.




For Diaphragm Pump Accessories see pages 32-34.

P29122-600

For recommended key models, refer to the ARO diaphragm pump price book (Form 2240-2). If the specific model you seek is not in the price book, consult the factory for further selection assistance.

# Ordering

Best Selling Models | PD02P-APS-PTA, PD02P-APS-PTT, PD02P-ADS-DTT, PD02P-AKS-KTT

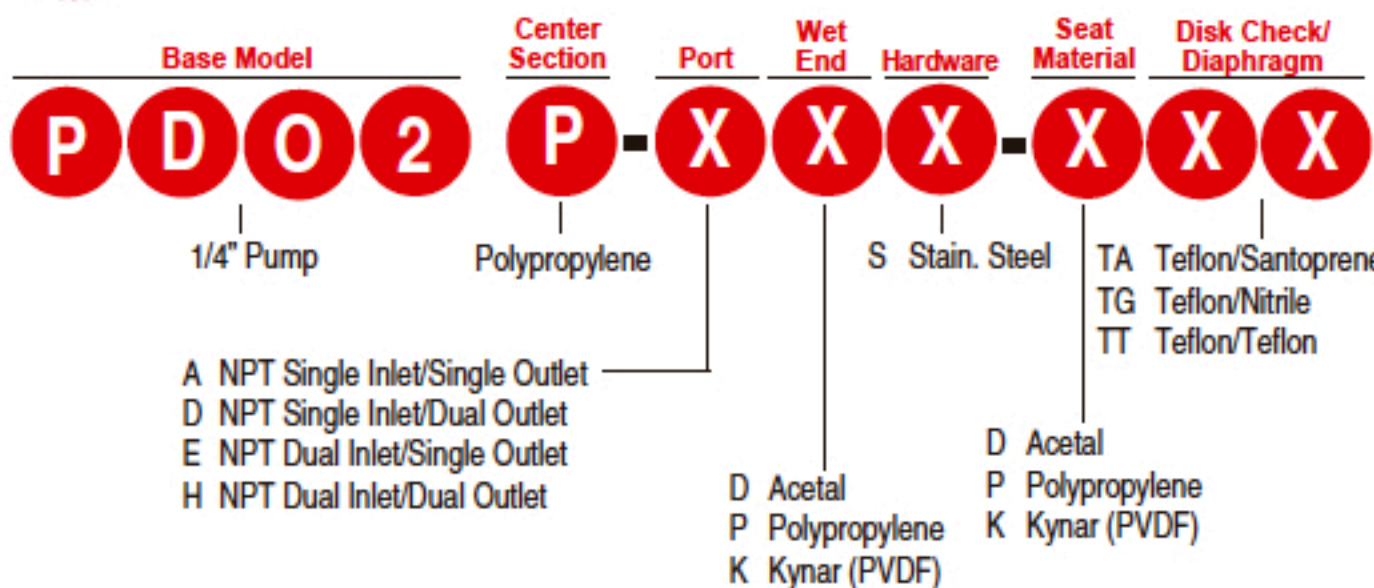

360°  
mounting  
versatility!

