

800<sup>+</sup>  
SUMMER TYRES SIZES

200<sup>+</sup>  
WINTER TYRES SIZES

60<sup>+</sup>  
ALL SEASON TYRES

 **POWERTRAC**  
*Enjoy powerful traction*



POWERTRAC TYRE CO., LIMITED

Add: Room 2001, Jinding Mansion,  
No. 83 Haier Road, Laoshan District, Qingdao, China

 **POWERTRAC**  
*Enjoy powerful traction*

**PCR TIRES  
CATALOGUE**





# MANUFACTURE INTRODUCTION

## PCR&TBR

20 million pieces PCR  
5 million sets TBR

## ISO

the certifications of  
ISO/TS 16949 Quality  
Management System

Powertrac Tyre Co., Limited, belongs to Shandong Haohua Tire Co., Ltd as a sales company focusing on selling POWERTRAC brand.

Shandong Haohua Tire Co., Ltd. is located at Binhai National Economic Development Zone, Weifang, Shandong - the beautiful national Circum -Bohai-Sea blue economic area.

Shandong Haohua Tire Co., Ltd. is a large modern enterprise founded in 2011 in the green and eco-friendly concept, covers an area of 1,066,672 square meters with the 554,000 square meters' building area, total investment amounts to 500 million USD with flowers blooming and trees shading the street in the factory. The company boasts advanced tire R&D capability, production technology, test equipment and a specialized technology and management team (all members have work experience of 15 years averagely in the industry, including two senior economists, two senior engineers, sixteen intermediate engineers, three doctors and five masters), and achieves an annual production of 20 million pieces PCR and 5 million sets TBR respectively and the annual turnover is about 1 billion USD.

Shandong Haohua Tire Co., Ltd. people uphold the spirit of "Credibility, Cooperation, Diligence, Innovation", establish the service concept of "Focus on Production by Enterprise, Staff by Management, Customer in Market, and Social Responsibility by Haohua", and build up a noted national tire brand in the environmental ethic of "Low-carbon, Economy, Green, Safety".

Shandong Haohua Tire Co., Ltd. has obtained the certifications of ISO/TS 16949 Quality Management System, ISO 14001 Environmental Management System and OHSAS 18001 Occupational Health and Safety Management System, as well as CCC, ECE,SMARK, DOT, INMETRO, and GCC. "Haohua" tires are featured by high cost performance, low carbon, environmental protection, noiselessness, comfort, safety and reliability, with UHP SUV as our leading product.

We sincerely hope to be your trustworthy friend!

# CONTENTS

Manufacture Introduction	01
Pattern Selection Guide	05
ECO	07
UHP	15
H/T	25
A/T M/T	31
VAN	39
White Sidewall	45
4-SEASON	51
SNOW	55
Certificates	67



**Safety Comfort Durable**

**Economy Environmental**

### Enterprise Core Values

Professional and dedicated sales team, Long-term and stable customers, Worldwide sales network, Rich experience in marketing, Fast and accurate market information, Unique product line, Consistent quality service.

### Work style

**Professional:** Serve customers in the most professional way.

**Efficient:** We provide the fastest solutions.

**Enthusiastic:** Follow up cooperation with the greatest enthusiasm.

**Persistence:** With the most sincere attitude to achieve the win-win cooperation.

### Cultural philosophy

**Enterprise mission:** Bring excellent Chinese tyres to all over the world.

**Enterprise vision:** Become the international leading tyre supplier.

### Business philosophy

Take the staff as the root and take the customer as the center.

Product-based, market-oriented.

Constantly improve brand core competitiveness, aim to be the global leading tyre supplier.





# Pattern Selection Guide



ECO



Adamas H/P

Citymarch

Taxi Max



VAN



Vantour

Loading



UHP



Racing Pro

Cityracing-UHP

Cityracing-RFT



White Sidewall



Vanmarch

Roadtour



H/T



Cityracing-SUV

Cityrover



4-SEASON



PowerMarch A/S



A/T M/T



Power Lander A/T

Power Rover M/T

Power Rover M/T II



SNOW



Snowtour

Snowstar

Snowmarch

Snowmarch Stud

Ice X pro





**ECO**



**ADAMAS H/P**



**CITYMARCH**



**TAXI MAX**




NEW

# ADAMAS H/P



Performance test:

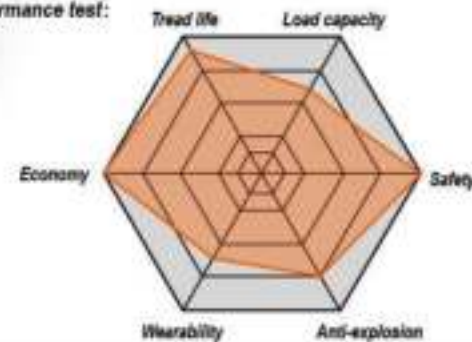

### M+S

RIM SIZE	12 - 16
SERIES	55 - 80
SPEED RATING	T - V

Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance.

Continuous solid center rib and lateral tread blocks connected by rib-in-chain enhance steering stability, decrease block deformation and reduce energy loss.



Continuous tread blocks on both shoulder give great support to enhance the stability when cornering, the closed shoulders deliver excellent quiet ride.


Special tread compound delivers excellent grip on both dry and wet roads and offer longer mileage.

Wheel Diameter	Size	Index	Sidewall Description	RIM	1/32"	Width MM	OA diameter MM	Max Pressure kPa/Psi	RR	WG	SL
12	145/70R12	65T	BSW	4.5	9.0	145	509	300/44	E	C	70
	155/70R12	73T	BSW	4.5	9.0	155	523	300/44	E	C	70
	165/70R12	77T	BSW	5.0	8.8	165	537	300/44	E	C	70
	175/70R12	80T	BSW	5.0	8.5	175	551	300/44	E	C	70
	145/80R13	71T	BSW	4.5	8.5	150	534	300/44	E	C	70
	145/80R13	75T	BSW	4.0	8.5	145	562	300/44	E	C	70
13	155/85R13	73T	BSW	4.5	9.2	157	532	300/44	E	C	70
	155/70R13	75T	BSW	4.5	9.2	157	548	300/44	E	C	70
	155/80R13	75T	BSW	4.5	9.2	157	576	300/44	E	C	70
	165/65R13	77T	BSW	5.0	9.2	170	544	300/44	E	C	70
	165/70R13	79T	BSW	5.0	9.2	170	562	300/44	E	C	70
	165/80R13	83T	BSW	4.5	9.2	165	594	300/44	E	C	70
	175/60R13	77H	BSW	5.0	9.2	177	540	300/44	E	C	70
	175/65R13	80T	BSW	5.0	9.6	177	558	300/44	E	C	70
	175/70R13	82T	BSW	5.0	9.2	177	576	300/44	E	C	70
	185/70R13	86T	BSW	5.5	9.2	189	590	300/44	E	C	70
	155/65R14	75H	BSW	4.5	9.2	157	538	300/44	E	C	70
	165/60R14	75H	BSW	5.0	9.2	170	554	300/44	E	C	70
14	165/60R14	79TXL	BSW	5.0	8.5	170	554	340/50	E	C	71
	165/65R14	79H	BSW	5.0	9.2	170	570	300/44	E	C	70
	165/70R14	81H	BSW	5.0	9.2	170	588	300/44	E	C	70
	165/70R14	85TXL	BSW	5.0	9.0	170	588	340/50	E	C	71
	175/65R14	82H	BSW	5.0	9.2	177	584	300/44	E	C	70
	175/65R14	86TXL	BSW	5.0	9.2	177	584	340/50	E	C	71
	175/70R14	84H	BSW	5.0	9.2	177	602	300/44	E	C	70
	175/70R14	88TXL	BSW	5.0	9.2	177	602	340/50	E	C	71
	185/50R14	77V	BSW	6.0	8.8	194	542	300/44	E	C	70
	185/55R14	80H	BSW	6.0	9.9	194	560	300/44	E	C	70
	185/60R14	82H	BSW	5.5	9.4	189	578	300/44	E	C	70
	185/65R14	86H	BSW	5.5	9.4	189	596	300/44	E	C	70
	185/70R14	88H	BSW	5.5	9.4	189	616	300/44	E	C	70
	195/60R14	86H	BSW	6.0	9.4	201	590	300/44	E	C	71
	195/65R14	89H	BSW	6.0	8.8	201	610	300/44	E	C	71
	195/70R14	91H	BSW	6.0	9.4	201	630	300/44	E	C	71
	205/60R14	88H	BSW	6.0	9.8	209	602	300/44	E	C	71
	205/70R14	95H	BSW	6.0	9.8	209	644	300/44	E	C	71
15	145/65R15	72T	BSW	4.5	8.5	150	560	300/44	E	C	70
	155/60R15	74T	BSW	4.5	8.5	157	567	300/44	E	C	70
	165/60R15	77H	BSW	5.0	8.5	170	579	300/44	E	C	70
	165/65R15	81H	BSW	5.0	8.5	170	595	300/44	E	C	70
	175/55R15	77H	BSW	5.5	9.4	182	573	300/44	E	C	70
	175/60R15	81H	BSW	5.0	9.4	177	591	300/44	E	C	70
	175/65R15	84H	BSW	5.0	9.4	177	609	300/44	E	C	70
	185/55R15	82V	BSW	6.0	9.4	194	585	300/44	E	C	70
	185/60R15	84H	BSW	5.5	9.4	189	603	300/44	E	C	70
	185/60R15	88-XXL	BSW	5.5	9.4	189	603	340/50	E	C	71
	185/65R15	88H	BSW	5.5	9.4	189	621	300/44	E	C	70
	185/65R15	92TXL	BSW	5.5	9.4	189	621	340/50	E	C	71
	195/50R15	82V	BSW	6.0	12.0	201	577	300/44	E	C	71
	195/55R15	85V	BSW	6.0	11.3	201	595	300/44	E	C	71
	195/60R15	88H	BSW	6.0	9.4	201	615	300/44	E	C	71
	195/60R15	88V	BSW	6.0	9.4	201	615	300/44	E	C	71
	195/65R15	91V	BSW	6.0	9.4	201	635	300/44	E	C	71
	195/65R15	99-XXL	BSW	6.0	9.4	201	635	340/50	E	C	72
205/60R15	91V	BSW	6.0	9.8	209	627	300/44	E	C	71	
205/65R15	94H	BSW	6.0	9.8	209	647	300/44	E	C	71	
205/65R15	94V	BSW	6.0	9.8	209	647	300/44	E	C	71	
205/70R15	96H	BSW	6.0	9.8	209	669	300/44	E	C	71	
16	215/65R15	96H	BSW	6.5	10.0	221	661	300/44	E	C	71
	215/65R15	100HXL	BSW	6.5	9.2	221	661	340/50	E	C	72
	215/70R15	98H	BSW	6.5	10.0	221	683	300/44	E	C	71
	225/70R15	100H	BSW	6.5	10.0	228.0	697.0	300/44	E	C	71
	175/50R16	77V	BSW	5.5	8.5	182.0	582.0	300/44	E	C	70
	185/50R16	81V	BSW	6.0	8.8	194.0	592.0	300/44	E	C	70
	185/55R16	83V	BSW	6.0	8.8	194.0	610.0	300/44	E	C	70
	185/60R16	86H	BSW	6.0	8.5	199.0	628.0	300/44	E	C	70
	195/55R16	87V	BSW	6.0	8.8	201.0	620.0	300/44	E	C	71
	195/60R16	89H	BSW	6.0	8.8	201.0	640.0	300/44	E	C	71
	205/55R16	91V	BSW	6.5	9.8	214.0	632.0	300/44	E	C	71
	205/60R16	92V	BSW	6.0	9.8	209.0	652.0	300/44	E	C	71
285/60R16	96-XXL	BSW	6.0	9.8	209.0	652.0	340/50	E	C	72	
205/65R16	95H	BSW	6.0	10.0	209.0	672.0	300/44	E	C	71	
215/60R16	95V	BSW	6.5	10.0	221.0	664.0	300/44	E	C	71	
215/60R16	99-XXL	BSW	6.5	10.0	221.0	664.0	340/50	E	C	72	
215/65R16	98H	BSW	6.5	10.0	221.0	686.0	300/44	E	C	71	
215/65R16	102HXL	BSW	6.5	14.5	221.0	686.0	340/50	E	C	72	
225/60R16	102-XXL	BSW	6.5	9.2	228.0	676.0	340/50	E	C	72	
225/60R16	98H	BSW	6.5	10.0	228.0	676.0	300/44	E	C	71	
225/65R16	100H	BSW	6.5	9.2	228.0	696.0	300/44	E	C	71	
235/60R16	100H	BSW	7.0	10.0	240.0	688.0	300/44	E	C	71	

ECO



# CITYMARCH

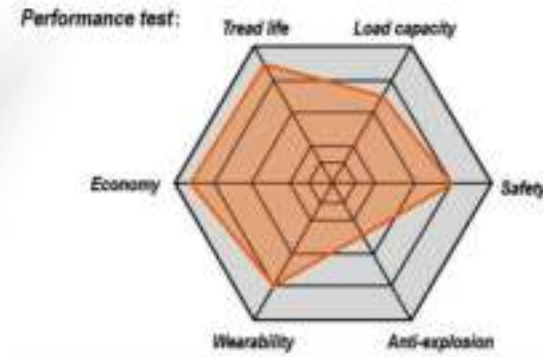

### M+S


RIM SIZE	13 - 16
SERIES	55 - 80
SPEED RATING	T - V



Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	O.A.diameter MM	Max Pressure kPa/Psi	RR	WG	SL
13'	155/65R13	73T	BLK	4.5B	7.8	9.2	157	532	300/44	E	C	70
	165/65R13	77T	BLK	5.0	7.3	9.2	170	544	300/44	E	C	70
	165/70R13	79T	BLK	5.0	7.3	9.2	170	562	300/44	E	C	70
	165/80R13	83T	BLK	4.5	7.3	9.2	165	594	300/44	E	C	70
	175/70R13	82T	BLK	5.0	7.3	9.2	177	576	300/44	E	C	70
14'	185/70R13	86T	BLK	5.5	7.3	9.2	189	590	300/44	E	C	70
	175/65R14	82H	BLK	5.0	7.3	9.2	177	584	300/44	E	C	70
	175/70R14	84H	BLK	5.0	7.3	9.2	177	602	300/44	E	C	70
	185/60R14	82H	BLK	5.5	7.5	9.4	189	578	300/44	E	C	70
	185/65R14	86H	BLK	5.5	7.5	9.4	189	596	300/44	E	C	70
	185/70R14	88H	BLK	5.5	7.5	9.4	189	616	300/44	E	C	70
	195/60R14	86H	BLK	6.0	7.5	9.4	201	590	300/44	E	C	71
	195/70R14	91H	BLK	6.0	7.5	9.4	201	630	300/44	E	C	71
	175/65R15	84H	BLK	5.0	7.5	9.4	177	609	300/44	E	C	70
	185/55R15	82V	BLK	6.0	7.5	9.4	194	585	300/44	E	C	70
15'	185/60R15	84H	BLK	5.5	7.5	9.4	189	603	300/44	E	C	70
	185/65R15	88H	BLK	5.5	7.5	9.4	189	621	300/44	E	C	70
	195/55R15	85H	BLK	6.0	7.5	9.4	201	595	300/44	E	C	71
	195/55R15	85V	BLK	6.0	7.8	9.8	201	595	300/44	E	C	71
	195/60R15	88H	BLK	6.0	7.5	9.4	201	615	300/44	E	C	71
	195/60R15	88V	BLK	6.0	7.5	9.4	201	615	300/44	E	C	71
	195/65R15	91H	BLK	6.0	7.5	9.0	201	635	300/44	E	C	71
	195/65R15	91V	BLK	6.0	7.5	9.4	201	635	300/44	E	C	71
	205/60R15	91V	BLK	6.0	7.8	9.8	209	627	300/44	E	C	71
	205/65R15	94H	BLK	6.0	7.8	9.8	209	647	300/44	E	C	71
	205/65R15	94V	BLK	6.0	7.8	9.8	209	647	300/44	E	C	71
	205/70R15	96H	BLK	6.0	7.8	9.8	209	669	300/44	E	C	71
	215/60R15	94H	BLK	6.5	8.0	10.0	221	639	300/44	E	C	71
	215/65R15	96H	BLK	6.5	8.0	10.0	221	661	300/44	E	C	71
	215/70R15	98H	BLK	6.5	8.0	10.0	221	683	300/44	E	C	71
16'	205/55R16	91H	BLK	6.5	7.8	9.8	214	632	300/44	E	C	71
	205/55R16	91V	BLK	6.5	7.8	9.8	214	632	300/44	E	C	71
	205/60R16	92V	BLK	6.0	7.8	9.8	209	652	300/44	E	C	71
	205/65R16	95H	BLK	6.0	7.8	9.8	209	672	300/44	E	C	71
	215/55R16	93H	BLK	7.0	7.8	10.0	226	642	300/44	E	C	71
	215/60R16	95H	BLK	6.5	8.0	10.0	221	664	300/44	E	C	71
	215/65R16	98H	BLK	6.5	8.0	10.0	221	686	300/44	E	C	71
	225/60R16	98H	BLK	6.5	8.0	10.0	228	676	300/44	E	C	71
	235/60R16	100H	BLK	7.0	8.0	10.0	240	688	300/44	E	C	71



# TAXI MAX

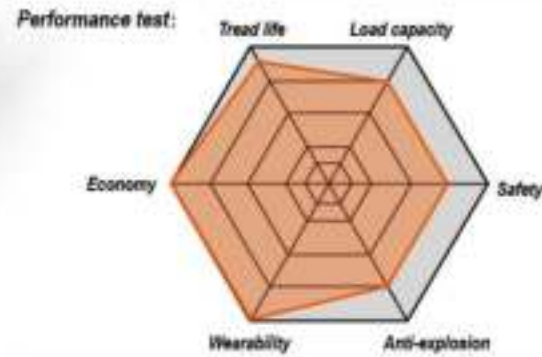

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	OA.diameter MM	Max Pressure kPa/Psi	RR	WG	SL
13'	165/70R13	79T	BSW	5.0	7.0	8.8	170	562	300/44	—	—	—
	175/70R14	84H	BSW	5.0	7.1	8.9	177	602	300/44	—	—	—
14'	185/60R14	82T	BSW	5.5	7.3	9.2	189	578	300/44	—	—	—
	195/60R14	86T	BSW	6.0	7.3	9.2	201	590	300/44	—	—	—
	185/65R15	88H	BSW	5.5	7.6	9.6	189	621	300/44	—	—	—
15'	195/55R15	85V	BSW	6.0	7.5	9.4	201	595	300/44	—	—	—
	195/60R15	88V	BSW	6.0	7.5	9.4	201	615	300/44	—	—	—
	195/65R15	91V	BSW	6.0	7.5	9.0	201	635	300/44	—	—	—
16'	205/55R16	91V	BSW	6.5	7.8	9.8	214	632	300/44	—	—	—
13'	LT165/70R13-6PR	88/86S	BSW	5.0	7.8	9.8	170	562	375/55	—	—	—

## M+S

RIM SIZE	13 - 16
SERIES	55 - 80
SPEED RATING	T - V

Safety performance on wet grounds four wide longitudinal straight groove efficiently drain off water ,improving sideslip performance on wet grounds.

Comfort and quietness small cross-slots at both side of continuous circumferential ribs in the middle simulate the muffler design principle and have strong noise absorption capacity thus ,noise is effectively reduced,and riding comfort is improved.



Small shoulder circumferential longitudinal grooves at both sides and pump little pattern blocks on shoulders bring ideal rigidity and excellent handing ,meanwhile ,small circumferential longitudinal grooves enable tires shoulders to diffuse heat quickly,providing higher safety performance.





**RACING Pro**



**CITYRACING-UHP**




**CITYRACING-RFT**



HOT  
SELLING  
PRODUCT

# RACING Pro

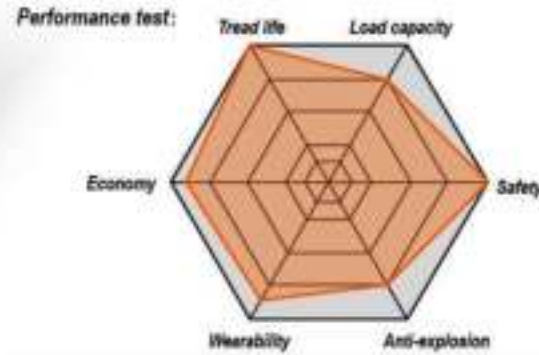

### M+S

RIM SIZE	15 - 21
SERIES	30 - 60
SPEED RATING	H - Y

Four wide vertical ditches ensure excellent drainage performance and handling performance of wetland pavement. Meanwhile, drainage groove and optimized curved tire shoulder design can ensure fast and efficient drainage in deep water-filled pavement, which can still guarantee wetland performance.

Raised design at the bottom of the trench, excellent quiet comfort the raised design at the bottom of the longitudinal trench with circumferential discontinuous pattern can interfere with the air column connected to the groove, reduce resonance and thus reduce the noise generated by the longitudinal trench.



The shoulder pattern block, accurate high-speed driving and control performance the outer continuous shoulder design, to strengthen the high-speed steering performance and lateral grip; Inside drainage trench ensure quick and efficient drainage.

Tread pattern, Stable performance in straight line large ground area of the continuous pattern block design, achieving good high-speed braking and steering stability.

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	OA diameter MM	Max Pressure kPa/Psi	RR	WG	SL	
15"	195/45R15	82VXL	BLK	6.0	7.0	8.8	201	556	300/44	C	8	71	
	195/50R15	82V	BLK	6.0	7.0	8.8	201	576	300/44	C	8	71	
	195/55R15	85V	BLK	6.0	7.0	8.8	201	595	300/44	C	8	71	
	205/50R15	86V	BLK	6.0	7.0	8.8	201	586	300/44	C	8	71	
	195/45R16	84VXL	BLK	6.0	7.0	8.8	201	582	300/40	C	8	72	
16"	195/50R16	88VXL	BLK	6.0	7.0	8.8	201	602	340/50	C	8	72	
	195/55R16	91VXL	BLK	6.0	7.0	8.8	201	620	340/50	C	8	72	
	195/60R16	89H	BLK	6.0	7.0	8.8	201	641	300/44	C	8	71	
	205/45ZR16	87WXL	BLK	7.0	7.0	8.8	206	591	340/50	C	8	71	
	205/50ZR16	91WXL	BLK	6.5	7.0	8.8	214	611	340/50	C	8	71	
	205/55ZR16	91V	BLK	6.5	7.0	8.8	214	632	300/44	C	8	69	
	205/55ZR16	94WXL	BLK	6.5	7.0	8.8	214	632	340/50	C	8	72	
	215/40ZR16	86WXL	BLK	7.5	7.0	8.8	218	578	340/50	C	8	72	
	215/45ZR16	90WXL	BLK	7.5	7.0	8.8	213	600	340/50	C	8	72	
	215/55ZR16	97WXL	BLK	7.0	7.0	8.8	226	642	340/50	C	8	72	
	225/50ZR16	96WXL	BLK	7.0	7.0	8.8	233	631	340/50	C	8	72	
	225/55ZR16	99WXL	BLK	7.0	7.0	8.8	233	654	340/50	C	8	72	
	17"	195/40ZR17	81WXL	BLK	7.0	7.0	8.8	200	589	340/50	C	8	72
		195/45ZR17	85WXL	BLK	6.5	7.0	8.8	195	607	340/50	C	8	72
		205/40ZR17	84WXL	BLK	7.5	7.0	8.8	212	596	340/50	C	8	72
		205/45ZR17	88WXL	BLK	7.0	7.0	8.8	206	616	340/50	C	8	72
		205/50ZR17	93YXL	BLK	6.5	7.0	8.8	214	638	340/50	C	8	72
		205/50ZR17	93WXL	BLK	6.5	7.0	8.8	214	638	340/50	C	8	72
		205/55ZR17	95WXL	BLK	6.5	7.0	8.8	214	657	340/50	C	8	72
215/45ZR17		91YXL	BLK	7.5	7.0	8.8	213	626	340/50	C	8	70	
215/45ZR17		91WXL	BLK	7.5	7.0	8.8	213	626	340/50	C	8	72	
215/50ZR17		95YXL	BLK	7.0	7.0	8.8	226	648	340/50	C	8	70	
215/50ZR17		95WXL	BLK	7.0	7.0	8.8	226	648	340/50	C	8	72	
215/55ZR17		98WXL	BLK	7.0	7.0	8.8	226	668	340/50	C	8	72	
225/45ZR17		94YXL	BLK	7.5	7.0	8.8	225	634	340/50	C	8	70	
225/45ZR17		94WXL	BLK	7.5	7.0	8.8	225	634	340/50	C	8	72	
225/50ZR17		98YXL	BLK	7.0	7.0	8.8	233	658	340/50	C	8	70	
225/50ZR17		98WXL	BLK	7.0	7.0	8.8	233	658	340/50	C	8	72	
225/55ZR17		101WXL	BLK	7.0	7.0	8.8	233	680	340/50	C	8	72	
235/45ZR17		97YXL	BLK	8.0	7.0	8.8	236	644	340/50	C	8	70	
235/45ZR17		97WXL	BLK	8.0	7.0	8.8	236	644	340/50	C	8	72	
235/50ZR17		100WXL	BLK	7.5	7.0	8.8	245	668	340/50	C	8	72	
235/55ZR17		103WXL	BLK	7.5	7.0	8.8	245	690	340/50	C	8	72	
18"	245/40ZR17	95YXL	BLK	8.5	7.0	8.8	248	628	340/50	C	8	71	
	245/40ZR17	95WXL	BLK	8.5	7.0	8.8	248	628	340/50	C	8	72	
	245/45ZR17	99YXL	BLK	8.0	7.0	8.8	243	652	340/50	C	8	71	
	245/45ZR17	99WXL	BLK	8.0	7.0	8.8	243	652	340/50	C	8	72	
	215/40ZR18	89YXL	BLK	7.5	7.0	8.8	218	629	340/50	C	8	70	
	215/40ZR18	89WXL	BLK	7.5	7.0	8.8	218	629	340/50	C	8	72	
	215/45ZR18	93YXL	BLK	7.5	7.0	8.8	213	651	340/50	C	8	70	
	215/45ZR18	93WXL	BLK	7.5	7.0	8.8	213	651	340/50	C	8	72	
	215/50ZR18	92W	BLK	7.0	7.0	8.8	220	672	340/50	C	8	72	
	215/55ZR18	99WXL	BLK	7.0	7.0	8.8	224	693	340/50	C	8	72	
	225/35ZR18	87YXL	BLK	8.0	7.0	8.8	230	615	340/50	C	8	72	
	225/35ZR18	87WXL	BLK	8.0	7.0	8.8	230	615	340/50	C	8	70	
	225/40ZR18	92YXL	BLK	8.0	7.0	8.8	230	637	340/50	C	8	70	
	225/40ZR18	92WXL	BLK	8.0	7.0	8.8	230	637	340/50	C	8	72	
	225/45ZR18	95YXL	BLK	7.5	7.0	8.8	225	659	340/50	C	8	70	
225/45ZR18	95WXL	BLK	7.5	7.0	8.8	225	659	340/50	C	8	72		
225/50ZR18	99WXL	BLK	7.5	7.0	8.8	228	683	340/50	C	8	72		
225/55ZR18	102WXL	BLK	7.0	7.0	8.8	233	704	300/44	C	8	72		
235/40ZR18	95YXL	BLK	8.0	7.0	8.8	241	645	340/50	C	8	70		
235/40ZR18	95WXL	BLK	8.0	7.0	8.8	241	645	340/50	C	8	72		
235/45ZR18	98YXL	BLK	8.0	7.0	8.8	236	669	340/50	C	8	70		
235/45ZR18	98WXL	BLK	8.0	7.0	8.8	236	669	340/50	C	8	72		




Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	OA. diameter MM	Max Pressure kPa/Psi	RR	WG	SL
18"	235/50ZR18	101YXL	BLK	7.5	7.0	8.8	245	693	340/50	C	B	70
	235/50ZR18	101WXL	BLK	7.5	7.0	8.8	245	693	340/50	C	B	72
	235/55ZR18	104YXL	BLK	7.5	7.0	8.8	245	715	340/50	C	B	70
	235/55ZR18	104WXL	BLK	7.5	7.0	8.8	245	715	340/50	C	B	72
	245/35ZR18	92YXL	BLK	8.5	7.0	8.8	248	629	340/50	C	B	72
	245/35ZR18	92WXL	BLK	8.5	7.0	8.8	248	629	340/50	C	B	70
	245/40ZR18	97YXL	BLK	8.5	7.0	8.8	248	653	340/50	C	B	71
	245/40ZR18	97WXL	BLK	8.5	7.0	8.8	248	653	340/50	C	B	72
	245/45ZR18	100YXL	BLK	8.0	7.0	8.8	243	677	340/50	C	B	71
	245/45ZR18	100WXL	BLK	8.0	7.0	8.8	243	677	340/50	C	B	72
	245/50ZR18	104WXL	BLK	7.5	7.0	8.8	247	702	340/50	C	B	72
	255/35ZR18	94YXL	BLK	9.0	7.0	8.8	260	635	340/50	C	B	73
	255/35ZR18	94WXL	BLK	9.0	7.0	8.8	260	635	340/50	C	B	71
	255/40ZR18	99YXL	BLK	9.5	7.0	8.8	260	661	340/50	C	B	71
	255/40ZR18	99WXL	BLK	9.5	7.0	8.8	260	661	340/50	C	B	73
	255/45ZR18	103YXL	BLK	8.5	7.0	8.8	255	687	340/50	C	B	71
	255/45ZR18	103WXL	BLK	8.5	7.0	8.8	255	687	340/50	C	B	73
	255/55ZR18	109YXL	BLK	8.0	7.0	8.8	265	737	340/50	C	B	71
	255/55ZR18	109WXL	BLK	8.0	7.0	8.8	265	737	340/50	C	B	73
	265/35ZR18	97YXL	BLK	9.5	7.0	8.8	271	643	340/50	C	B	73
	265/35ZR18	97WXL	BLK	9.5	7.0	8.8	271	643	340/50	C	B	73
	265/40ZR18	101YXL	BLK	9.5	7.0	8.8	271	669	340/50	C	B	73
	275/40ZR18	103YXL	BLK	9.5	7.0	8.8	285	677	340/50	C	B	73
	285/35ZR18	101YXL	BLK	9.5	7.0	8.8	290	657	340/50	C	B	73
	215/35ZR19	85YXL	BLK	8.0	7.0	8.8	220	633	340/50	C	B	73
	225/35ZR19	88YXL	BLK	8.0	7.0	8.8	230	640	340/50	C	B	73
	225/40ZR19	93YXL	BLK	8.0	7.0	8.8	230	663	340/50	C	B	70
	225/40ZR19	93WXL	BLK	8.0	7.0	8.8	230	663	340/50	C	B	72
	225/45ZR19	96YXL	BLK	7.5	7.0	8.8	225	685	340/50	C	B	70
	225/45ZR19	96WXL	BLK	7.5	7.0	8.8	225	685	340/50	C	B	72
	225/55ZR19	99V/99Y	BLK	7.0	7.0	8.8	233	728	340/50	C	B	70
	235/35ZR19	91YXL	BLK	8.5	7.0	8.8	241	647	340/50	C	B	72
235/35ZR19	91WXL	BLK	8.5	7.0	8.8	241	647	340/50	C	B	70	
235/40ZR19	96YXL	BLK	8.5	7.0	8.8	241	645	340/50	C	B	70	
235/40ZR19	96WXL	BLK	8.5	7.0	8.8	241	645	340/50	C	B	72	
235/45ZR19	99YXL	BLK	8.0	7.0	8.8	236	695	340/50	C	B	70	
235/45ZR19	99WXL	BLK	8.0	7.0	8.8	236	695	340/50	C	B	72	
235/50ZR19	103YXL	BLK	7.5	7.0	8.8	245	719	340/50	C	B	70	
235/50ZR19	103WXL	BLK	7.5	7.0	8.8	245	719	340/50	C	B	72	
235/55ZR19	105WXL	BLK	7.5	7.0	8.8	245	741	340/50	C	B	72	
245/35ZR19	93YXL	BLK	8.5	7.0	8.8	248	655	340/50	C	B	72	
245/35ZR19	93WXL	BLK	8.5	7.0	8.8	248	655	340/50	C	B	71	
245/40ZR19	98YXL	BLK	8.5	7.0	8.8	248	679	340/50	C	B	71	
245/40ZR19	98WXL	BLK	8.5	7.0	8.8	248	679	340/50	C	B	72	
245/45ZR19	102YXL	BLK	8.0	7.0	8.8	243	703	340/50	C	B	71	
245/45ZR19	102WXL	BLK	8.0	7.0	8.8	243	703	340/50	C	B	72	
245/55ZR19	107WXL	BLK	7.5	7.0	8.8	253	752	340/50	C	B	72	
255/30ZR19	91YXL	BLK	9.0	7.0	8.8	260	637	340/50	C	B	73	
255/30ZR19	91WXL	BLK	9.0	7.0	8.8	260	637	340/50	C	B	71	
255/35ZR19	96YXL	BLK	9.0	7.0	8.8	260	661	340/50	C	B	73	
255/35ZR19	96WXL	BLK	9.0	7.0	8.8	260	661	340/50	C	B	71	
255/40ZR19	100YXL	BLK	9.0	7.0	8.8	260	687	340/50	C	B	71	
255/40ZR19	100WXL	BLK	9.0	7.0	8.8	260	687	340/50	C	B	73	
255/45ZR19	104YXL	BLK	8.5	7.0	8.8	255	715	340/50	C	B	71	
255/45ZR19	104WXL	BLK	8.5	7.0	8.8	255	715	340/50	C	B	73	
255/50ZR19	107YXL	BLK	8.0	7.0	8.8	265	739	340/50	C	B	71	
255/50ZR19	107WXL	BLK	8.0	7.0	8.8	265	739	340/50	C	B	73	
255/55ZR19	111YXL	BLK	8.0	7.0	8.8	265	763	340/50	C	B	71	
255/55ZR19	111WXL	BLK	8.0	7.0	8.8	265	763	340/50	C	B	73	
265/30ZR19	93YXL	BLK	9.5	7.8	9.8	271	643	340/50	C	B	73	
265/30ZR19	93WXL	BLK	9.5	7.8	9.8	271	643	340/50	C	B	71	
265/50ZR19	110WXL	BLK	8.5	7.8	9.8	277	749	340/50	C	B	73	

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	OA. diameter MM	Max Pressure kPa/Psi	RR	WG	SL
19"	275/30ZR19	96YXL	BLK	9.5	7.8	9.8	278	649	340/50	C	B	73
	275/30ZR19	96WXL	BLK	9.5	7.8	9.8	278	649	340/50	C	B	71
	275/35ZR19	100YXL	BLK	9.5	7.8	9.8	278	675	340/50	C	B	73
	275/35ZR19	100WXL	BLK	9.5	7.8	9.8	278	675	340/50	C	B	71
	275/40ZR19	105YXL	BLK	9.5	7.8	9.8	278	703	340/50	C	B	71
	275/40ZR19	105WXL	BLK	9.5	7.8	9.8	278	703	340/50	C	B	73
	275/45ZR19	108WXL	BLK	9.0	7.8	9.8	278	730	340/50	C	B	70
	275/55ZR19	111WXL	BLK	8.5	7.8	9.8	280	785	300/44	C	B	70
	285/45ZR19	111WXL	BLK	9.5	7.8	9.8	285	739	340/50	C	B	70
	195/55R20	95HXL	BLK	6.0	7.0	8.8	201	722	340/50	C	B	71
	225/35ZR20	93YXL	BLK	8.0	7.0	8.8	230	666	340/50	C	B	72
	235/30ZR20	88YXL	BLK	8.5	7.0	8.8	242	650	340/50	C	B	72
	235/35ZR20	92YXL	BLK	8.5	7.0	8.8	242	672	340/50	C	B	72
	245/30ZR20	97YXL	BLK	8.5	7.0	8.8	247	655	310/50	C	B	72
	245/35ZR20	95YXL	BLK	8.5	7.0	8.8	248	680	340/50	C	B	72
	245/35ZR20	95WXL	BLK	8.5	7.0	8.8	248	680	340/50	C	B	71
	245/40ZR20	99YXL	BLK	8.5	7.0	8.8	248	704	340/50	C	B	71
	245/40ZR20	99WXL	BLK	8.5	7.0	8.8	248	704	340/50	C	B	72
	245/45ZR20	103WXL	BLK	8.0	7.0	8.8	243	729	340/50	C	B	72
	255/30ZR20	92YXL	BLK	9.0	7.0	8.8	260	662	340/50	C	B	73
	255/30ZR20	92WXL	BLK	9.0	7.0	8.8	260	662	340/50	C	B	71
	255/35ZR20	97YXL	BLK	9.0	7.0	8.8	260	686	340/50	C	B	73
	255/35ZR20	102YXL	BLK	9.0	7.0	8.8	260	686	340/50	C	B	71
	255/35ZR20	102WXL	BLK	9.0	7.0	8.8	260	686	340/50	C	B	71
	255/45ZR20	105WXL	BLK	8.5	7.0	8.8	255	738	340/50	C	B	71
	255/50ZR20	109WXL	BLK	8.0	7.0	8.8	265	763	340/50	C	B	71
	255/55ZR20	110WXL	BLK	8.0	7.0	8.8	263	789	340/50	C	B	71
	265/45ZR20	108WXL	BLK	9.0	7.0	8.8	266	747	340/50	C	B	71
	265/50ZR20	111WXL	BLK	9.0	7.0	8.8	277	773	340/50	C	B	73
	275/30ZR20	97YXL	BLK	9.5	7.0	8.8	278	674	340/50	C	B	73
	275/30ZR20	97WXL	BLK	9.5	7.0	8.8	278	674	340/50	C	B	71
	275/35ZR20	102YXL	BLK	9.5	7.0	8.8	278	700	340/50	C	B	73
275/35ZR20	102WXL	BLK	9.5	7.0	8.8	278	700	340/50	C	B	71	
275/40ZR20	106YXL	BLK	9.5	7.0	8.8	278	728	340/50	C	B	71	
275/45ZR20	110YXL	BLK	9.0	7.0	8.8	273	756	340/50	C	B	71	
275/50ZR20	113WXL	BLK	8.5	7.0	8.8	284	783	340/50	C	B	71	
275/55ZR20	117WXL	BLK	8.5	7.0	8.8	284	810	340/50	C	B	73	
275/60R20	115H	BLK	8.0	7.0	8.8	279	838	340/50	C	B	71	
285/30ZR20	99YXL	BLK	8.5	7.0	8.8	297	679	340/50	C	B	73	
285/35ZR20	104Y XL	BLK	8.5	7.0	8.8	297	708	340/50	C	B	73	
285/50ZR20	116WXL	BLK	9.0	7.0	8.8	297	793	340/50	C	B	73	
305/40ZR20	112WXL	BLK	11.0	7.0	8.8	313	752	340/50	C	B	73	
315/35ZR20	110YXL	BLK	11.0	7.8	9.8	320	728	340/50	C	B	75	
315/35ZR20	110WXL	BLK	11.0	7.8	9.8	320	728	340/50	C	B	75	
21"	245/35ZR21	96YXL	BLK	8.5	7.8	9.8	245	705	340/50	C	B	73
	245/40ZR21	100YXL	BLK	8.5	7.0	8.8	245	729	340/50	C	B	73
	265/40ZR21	105YXL	BLK	8.5	7.0	8.8	270	745	340/50	C	B	73
	265/45ZR21	108YXL	BLK	9.5	7.0	8.8	270	772	340/50	C	B	73
	275/30ZR21	98YXL	BLK	9.5	7.0	8.8	278	698	340/50	C	B	73
	275/40ZR21	107YXL	BLK	9.5	7.8	9.8	283	752	340/50	C	B	71
	275/40ZR21	107WXL	BLK	9.5	7.8	9.8	283	752	340/50	C	B	73
	275/45ZR21	111YXL	BLK	9.5	7.0	8.8	278	780	340/50	C	B	71
	275/45ZR21	111WXL	BLK	9.								



# CITYRACING-UHP

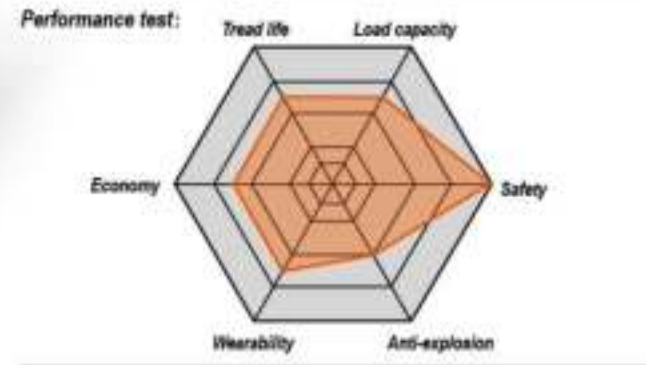

### M+S

RIM SIZE	15 - 24
SERIES	25 - 55
SPEED RATING	V - W

Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.

Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.



Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.


Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	OA.diameter MM	Max Pressure kPa/Psi	RR	WG	SL
15"	195/50R15	82V	BLK	6.0	8.0	10.0	201	577	300/44	E	C	70
	195/55R15	85V	BLK	6.0	8.0	10.0	201	595	300/44	E	C	70
	185/55R16	87VXL	BLK	6.0	7.8	10.0	194	545	340/50	E	C	70
	195/45R16	84VXL	BLK	6.5	8.0	10.0	195	582	340/50	E	C	70
	195/50R16	88VXL	BLK	6.0	7.0	9.0	201	560	340/50	E	C	70
16"	195/55R16	91VXL	BLK	6.0	8.0	10.0	190	619	340/50	E	C	70
	205/45ZR16	87WXL	BLK	7.0	8.0	10.0	206	590	340/50	E	C	70
	205/50ZR16	91WXL	BLK	6.5	8.0	10.0	214	612	340/50	E	C	70
	205/55ZR16	94WXL	BLK	6.5	8.0	10.0	214	632	340/50	E	C	70
	215/55ZR16	97WXL	BLK	7.0	8.0	10.0	226	642	340/50	E	C	71
	225/50ZR16	96WXL	BLK	7.0	7.8	10.0	223	632	340/50	E	C	72
	225/55ZR16	99WXL	BLK	7.0	8.0	10.0	233	680	340/50	E	C	71
	205/40ZR17	84WXL	BLK	7.5	8.0	10.0	212	596	340/50	E	C	70
	205/45ZR17	88WXL	BLK	7.0	8.0	10.0	206	616	340/50	E	C	70
	205/50ZR17	93WXL	BLK	6.5	8.0	10.0	214	638	340/50	E	C	70
17"	205/55ZR17	95WXL	BLK	6.0	7.8	10.0	214	658	340/50	E	C	71
	215/45ZR17	91WXL	BLK	7.0	8.0	10.0	213	626	340/50	E	C	71
	215/50ZR17	95WXL	BLK	7.5	8.0	10.0	226	648	340/50	E	C	71
	215/55ZR17	98WXL	BLK	7.0	8.0	10.0	226	668	340/50	E	C	71
	225/45ZR17	94WXL	BLK	7.5	8.0	10.0	225	634	340/50	E	C	71
	225/50ZR17	98WXL	BLK	8.0	8.0	10.0	233	658	340/50	E	C	71
	225/55R17	101WXL	BLK	7.0	8.0	10.0	233	680	340/50	E	C	71
	235/45ZR17	97WXL	BLK	7.5	8.0	10.0	236	644	340/50	E	C	71
	235/50ZR17	100WXL	BLK	7.5	8.0	10.0	245	668	340/50	E	C	71
	235/55ZR17	103WXL	BLK	7.5	8.0	10.0	245	690	340/50	E	C	71
	245/40ZR17	95WXL	BLK	8.0	7.0	9.0	248	628	340/50	E	C	71
	245/45ZR17	99WXL	BLK	8.0	8.0	10.0	243	652	340/50	E	C	71
	215/35ZR18	84WXL	BLK	7.5	8.0	10.0	218	607	340/50	E	C	71
	215/45ZR18	93WXL	BLK	7.0	7.0	9.0	213	651	340/50	E	C	71
	225/40ZR18	92WXL	BLK	8.5	8.0	10.0	230	637	340/50	E	C	71
18"	225/45ZR18	95WXL	BLK	7.5	8.0	10.0	225	659	340/50	E	C	71
	235/40ZR18	95WXL	BLK	8.5	8.0	10.0	241	645	340/50	E	C	71
	235/45ZR18	98WXL	BLK	8.0	8.0	10.0	240	667	340/50	E	C	71
	235/50ZR18	101WXL	BLK	7.5	8.0	10.0	243	693	340/50	E	C	71
	245/40ZR18	97WXL	BLK	8.5	8.0	10.0	248	653	340/50	E	C	72
	245/45ZR18	100WXL	BLK	8.0	8.0	10.0	243	677	340/50	E	C	72
	255/35ZR18	94WXL	BLK	9.0	7.2	9.0	260	635	340/50	E	C	70
	255/40ZR18	99WXL	BLK	9.0	8.0	10.0	263	661	340/50	E	C	72
	255/45ZR18	103WXL	BLK	8.0	7.0	9.0	255	687	340/50	E	C	71
	225/35ZR19	88WXL	BLK	8.0	7.0	8.8	230	641	340/50	E	C	71
19"	235/35ZR19	91WXL	BLK	8.5	8.0	10.0	241	647	340/50	E	C	71
	235/55R19	105VXL	BLK	7.0	7.8	10.0	245	741	340/50	E	C	72
	245/35ZR19	93WXL	BLK	8.5	8.0	10.0	248	655	340/50	E	C	72
	245/40ZR19	98WXL	BLK	8.5	7.0	8.8	248	679	340/50	E	C	72
	245/45ZR19	102WXL	BLK	8.0	7.0	8.8	243	703	340/50	E	C	72
	245/55R19	107VXL	BLK	7.0	7.8	10.0	253	753	340/50	E	C	72
	255/35ZR19	96WXL	BLK	9.0	7.0	8.8	260	661	340/50	E	C	72
	225/35ZR20	90WXL	BLK	8.0	7.2	9.0	230	641	340/50	E	C	71
	225/35ZR20	93WXL	BLK	8.0	8.0	10.0	230	666	340/50	E	C	72
	245/30ZR20	97WXL	BLK	8.5	8.0	10.0	247	657	340/50	E	C	72
20"	245/35ZR20	95WXL	BLK	8.5	8.0	10.0	248	680	340/50	E	C	72
	255/35ZR20	97WXL	BLK	9.0	8.0	10.0	260	686	340/50	E	C	72
	255/35ZR20	102WXL	BLK	9.0	7.2	9.0	260	686	340/50	E	C	72
	245/30ZR20	90WXL	BLK	8.5	7.0	8.8	248	656	340/50	E	C	72
	245/45ZR20	103WXL	BLK	8.0	7.0	8.8	243	728	340/50	E	C	72
	255/45ZR20	105WXL	BLK	8.5	7.0	8.8	255	738	340/50	E	C	73
22"	245/30ZR22	92WXL	BLK	8.5	8.0	10.0	247	708	340/50	E	C	72
	255/30ZR22	95WXL	BLK	9.0	8.0	10.0	259	713	340/50	E	C	72
24"	255/30ZR24	97WXL	BLK	9.0	8.0	10.0	255	767	340/50	E	C	72
	275/25ZR24	96WXL	BLK	10.0	8.0	10.0	277	751	340/50	E	C	72

UHP



# CITYRACING-RFT

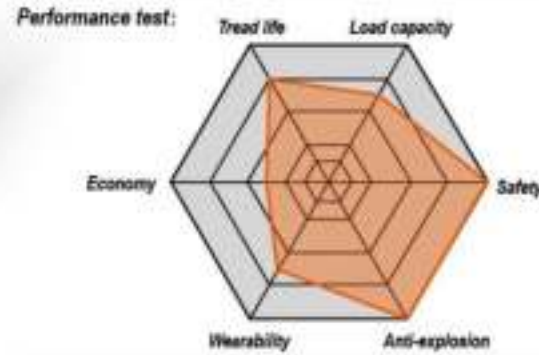

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	OA.diameter MM	Max Pressure kPa/Psi	RR	WG	SL
16"	195/55R16	91VXL	BLK	6.5	8.0	10.0	201	620	340/50	E	C	70
	205/55R16	94WXL	BLK	6.5	8.0	10.0	214	632	340/50	E	C	70
17"	205/45R17	88WXL	BLK	7.5	8.0	10.0	206	616	340/50	E	C	70
	205/50R17	93WXL	BLK	6.5	8.0	10.0	214	638	340/50	E	C	70
	225/50R17	98WXL	BLK	8.0	8.0	10.0	233	658	340/50	E	C	71
18"	225/45R17	94WXL	BLK	7.5	8.0	10.0	225	634	340/50	E	C	71
	225/40R18	92WXL	BLK	8.5	8.0	10.0	230	637	340/50	E	C	71
	245/40R18	97WXL	BLK	8.5	8.0	10.0	248	653	340/50	E	C	72
	245/45R18	100W	BLK	8	7	8.8	243	677	340/50	-	-	-
	255/35R18	94WXL	BLK	9.0	7.2	9.0	260	635	340/50	E	C	70

RFT

## M+S

RIM SIZE	16 - 18
SERIES	35 - 55
SPEED RATING	V - W

**Sidewall-reinforcement rubber**  
This sidewall-reinforcement rubber is an important part of RFT technology. It is stronger than normal tire rubber. When the tire's air is gone, sidewall-reinforcement rubber can still handle the vehicle's weight and keeps it driving.

**Low-heat bead**  
It uses low heat rubber, can restrain the heat under zero-pressure driving condition and increase the endurance.



**Low-heat bead**  
It uses low heat rubber, can restrain the heat under zero-pressure driving condition and increase the endurance.





**H/T**




**CITYRACING-SUV**



**CITYROVER**



# CITYRACING-SUV

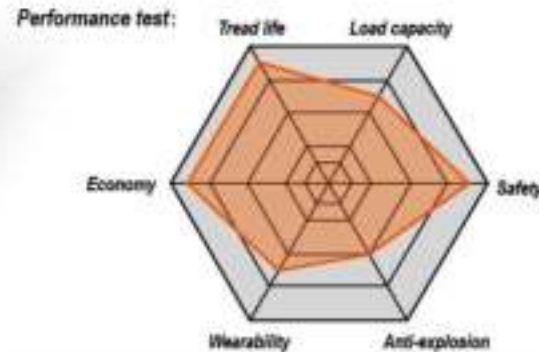

## M+S

RIM SIZE	17 - 24
SERIES	35 - 65
SPEED RATING	H - W

Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.

Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.




Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.

Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	O.A.diameter MM	Max Pressure kPa/Psi	RR	WG	SL
17"	235/65R17	108HXL	BLK	7.0	8.5	10.8	240	738	340/50	E	C	72
	245/65R17	107H	BLK	7.0	8.5	10.8	248	750	300/44	E	C	71
	255/60R17	110VXL	BLK	7.5	8.5	10.8	260	738	340/50	E	C	73
	255/65R17	110H	BLK	7.5	8.5	10.8	260	764	300/44	E	C	71
	265/65R17	112H	BLK	8.0	8.5	10.8	272	776	300/44	E	C	71
18"	255/55R18	109VXL	BLK	8.0	8.5	10.8	265	737	340/50	E	C	73
	255/60R18	112VXL	BLK	8.0	8.5	10.8	265	737	340/50	E	C	73
	225/55R19	103VXL	BLK	7.0	7.0	9.0	233	731	340/50	E	C	72
19"	255/50R19	107VXL	BLK	8.0	8.5	11.0	265	739	340/50	E	C	73
	255/55R19	111VXL	BLK	8.0	8.5	10.8	265	763	340/50	E	C	73
	285/45R19	111VXL	BLK	9.0	7.8	10.0	285	739	340/50	E	C	73
20"	265/50R20	111VXL	BLK	9.0	8.5	10.8	277	774	340/50	E	C	73
	275/40R20	106VXL	BLK	9.5	8.5	10.8	278	728	340/50	E	C	73
	275/45R20	110VXL	BLK	9.0	8.5	10.8	273	756	340/50	E	C	73
	275/55R20	117VXL	BLK	8.5	8.5	10.8	284	810	340/50	E	C	73
	275/60R20	119VXL	BLK	8.0	8.5	10.8	279	838	340/50	E	C	73
	285/50R20	116VXL	BLK	9.0	8.5	10.8	297	794	340/50	E	C	73
	305/35R20	107VXL	BLK	11.0	7.8	10.0	313	722	340/50	E	C	73
21"	315/35R20	110VXL	BLK	11.0	7.8	10.0	320	728	340/50	E	C	73
	295/35ZR21	107VXL	BLK	10.5	8.5	10.8	301	739	340/50	E	C	73
	295/40ZR21	111VXL	BLK	10.5	8.5	10.8	301	769	340/50	E	C	73
22"	265/35R22	102VXL	BLK	9.5	8.5	10.8	271	745	340/50	E	C	73
	285/35R22	106VXL	BLK	10.0	8.5	10.8	290	759	340/50	E	C	73
	305/40R22	114VXL	BLK	11.0	8.5	10.8	313	803	340/50	E	C	73
	305/45R22	118VXL	BLK	10.0	8.5	10.8	303	833	340/50	E	C	73
24"	295/35R24	110VXL	BLK	10.5	8.5	10.8	301	816	340/50	E	C	73
	305/35R24	112VXL	BLK	11.0	8.5	10.8	313	824	340/50	E	C	73



# CITYROVER

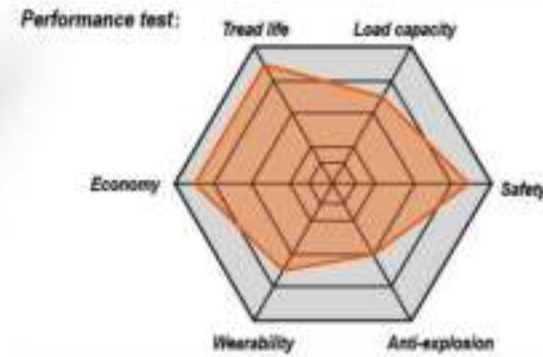

## M+S

RIM SIZE	16 - 18
SERIES	55 - 85
SPEED RATING	S - H

Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance.

Variable pitch pattern and solid center ribs improve the ride stability, reduce the noise and deliver a comfortable ride.



The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. Continuous tread blocks on both shoulder give great support to enhance the ride stability when cornering.

High-density sipes with special compound deliver a smooth ride and improve traction on dry and wet roads. Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability.

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	OA. diameter MM	Max Pressure kPa/Psi	RR	WG	SL	
16"	215/70R16	100H	BLK	6.0	8.3	10.7	221	708	300/44	C	C	71	
	225/70R16	107HXL	BLK	6.0	8.3	10.7	228	722	340/50	C	C	71	
	235/70R16	106H	BLK	7.0	8.5	10.8	240	736	300/44	C	C	71	
	245/70R16	107H	BLK	7.0	8.5	10.8	248	750	300/44	C	C	71	
	245/70R16	111HXL	BLK	7.0	8.5	10.8	248	750	340/50	C	C	71	
	255/65R16	109H	BLK	7.5	8.5	10.8	262	737	300/44	C	C	71	
	255/70R16	111H	BLK	7.5	8.5	10.8	260	764	300/44	C	C	71	
	265/70R16	112H	BLK	8.0	8.5	10.8	272	778	300/44	C	C	71	
	275/70R16	114H	BLK	8.0	8.5	10.8	279	792	300/44	C	C	72	
	215/60R17	96H	BLK	6.5	8.5	10.8	221	680	300/44	C	C	71	
17"	215/65R17	99H	BLK	6.5	8.5	10.8	221	710	300/44	C	C	71	
	225/60R17	99H	BLK	6.5	8.5	10.8	228	702	300/44	C	C	71	
	225/65R17	102H	BLK	6.5	8.5	10.8	228	724	300/44	C	C	71	
	235/60R17	102H	BLK	7.0	8.5	10.8	240	714	300/44	C	C	71	
	235/60R17	106HXL	BLK	7.0	8.3	10.7	240	714	300/44	C	C	71	
	235/65R17	104H	BLK	7.0	8.5	10.8	240	738	300/44	C	C	71	
	245/65R17	107H	BLK	7.0	8.5	10.8	248	750	340/50	C	C	71	
	245/65R17	111HXL	BLK	7.0	8.5	10.8	248	750	300/44	C	C	71	
	255/65R17	110H	BLK	7.5	8.5	10.8	260	764	300/44	C	C	71	
	265/65R17	112H	BLK	8.0	8.5	10.8	272	776	300/44	C	C	71	
18"	265/70R17	115H	BLK	8.0	8.5	10.8	272	804	300/44	C	C	71	
	275/65R17	115H	BLK	8.0	8.5	10.8	279	791	300/44	C	C	72	
	285/65R17	116H	BLK	8.5	8.5	10.8	292	802	300/44	C	C	72	
	215/55R18	96H	BLK	7.0	8.3	10.7	224	693	300/44	E	C	71	
	225/55R18	98H	BLK	7.0	8.3	10.7	233	705	300/44	C	C	72	
	225/60R18	104HXL	BLK	6.0	8.3	10.7	228	727	340/50	C	C	72	
	235/55R18	104HXL	BLK	7.5	8.5	10.8	245	715	340/50	C	C	71	
	235/60R18	107HXL	BLK	7.0	8.5	10.8	240	739	300/44	C	C	71	
	235/65R18	110HXL	BLK	7.0	8.2	10.5	240	763	340/50	C	C	71	
	245/60R18	105H	BLK	7.0	8.2	10.5	248	751	300/44	C	C	71	
16"	255/70R18	113H	BLK	7.0	8.2	10.5	260	815	300/44	C	C	71	
	265/60R18	110H	BLK	8.0	8.5	10.8	272	775	300/44	C	C	71	
	275/60R18	113H	BLK	8.0	8.3	10.7	279	787	300/44	C	C	71	
	275/65R18	116H	BLK	8.0	8.2	10.5	279	815	300/44	C	C	71	
	285/60R18	116H	BLK	8.5	8.5	10.8	290	802	300/44	C	C	72	
	17"	LT225/75R16	115/1125	—	6.0	8.3	10.7	223	744	550/80	—	—	—
		LT235/85R16	120/1165	—	6.0	8.3	10.7	235	806	550/80	—	—	—
		LT245/75R16	120/1165	—	7.0	8.3	10.7	248	774	550/80	—	—	—
		LT265/75R16	123/1205	—	7.0	8.3	10.7	267	804	550/80	—	—	—
	17"	LT245/75R17	121/1185	—	7.0	8.3	10.7	248	800	550/80	—	—	—
LT265/70R17		121/1185	—	8.0	8.3	10.7	272	804	550/80	—	—	—	





**A/T M/T**



**POWER  
LANDER A/T**




**POWER  
ROVER M/T**



**POWER  
ROVER M/T II**



# POWER LANDER A/T

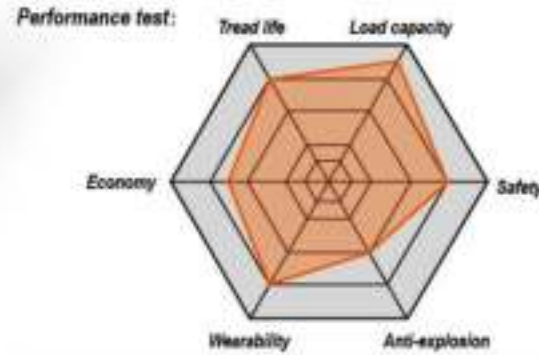

### M+S

RIM SIZE	15 - 20
SERIES	55 - 85
SPEED RATING	R - T

Four main zigzag grooves and rough lateral blocks provide excellent traction on all kinds of road conditions.

The block tread design with multiple-sipes provide outstanding off-road traction and reduce tread damage on off-road condition.




The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. The white letter styling provide a artistic image.

Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	OA.diameter MM	Max Pressure kPa/Psi	RR	WG	SL	
15'	P205/75R15	97T	OWL	5.0	8.2	10.5	203	689	300/44	E	B	71	
	P215/75R15	100T	OWL	6.0	8.2	10.5	216	703	300/44	E	B	71	
	P225/75R15	102T	OWL	6.0	8.2	10.5	223	719	300/44	E	B	71	
	P235/75R15	109SXL	OWL	6.5	9.0	11.4	235	733	340/50	E	B	72	
	P265/70R15	112T	OWL	8.0	9.2	11.8	272	753	300/44	E	B	72	
	P215/70R16	99T	BLK	6.5	9.0	11.4	221	768	300/44	C	C	72	
	P215/70R16	100T	BLK	6.5	9.0	11.4	221	768	300/44	E	B	71	
	P225/70R16	101T	OWL	6.5	9.0	11.4	228	722	300/44	E	B	71	
	P225/70R16	103T	BSW	6.5	8.5	11.0	228	722	300/44	E	B	71	
	P235/70R16	104T	OWL	7.0	9.0	11.4	240	736	300/44	E	B	71	
16'	P235/70R16	106T	OWL	7.0	9.0	11.4	240	736	300/44	E	B	71	
	P245/70R16	106T	OWL	7.0	9.0	11.4	248	750	300/44	E	B	71	
	P245/70R16	107T	OWL	7.0	9.0	11.4	248	750	300/44	E	B	71	
	P245/70R16	111SXL	BSW	7.0	9.0	11.0	248	750	340/50	E	B	71	
	P255/70R16	109T	OWL	7.0	9.2	11.8	260	764	300/44	E	B	72	
	P255/70R16	111T	OWL	7.5	9.5	12.0	260	764	300/44	E	B	72	
	P265/70R16	111T	OWL	8.0	9.5	12.0	272	778	300/44	E	B	72	
	P265/70R16	112T	OWL	8.0	9.5	12.0	272	778	300/44	C	C	72	
	P275/70R16	114T	OWL	8.0	9.5	12.0	279	792	300/44	E	B	72	
	P235/65R17	104T	BSW	7.0	8.8	11.3	240	738	300/44	E	B	72	
17'	P245/65R17	107T	BSW	7.0	8.8	11.1	248	750	300/44	E	B	72	
	P255/65R17	110T	OWL	7.5	9.5	12.0	259	762	300/44	E	B	71	
	P265/65R17	110T	OWL	7.5	9.5	12.0	272	776	300/44	E	B	71	
	P265/65R17	112T	OWL	7.5	9.5	12.0	272	776	300/44	E	B	72	
	P265/70R17	113T	OWL	8.0	9.5	12.0	272	804	300/44	E	B	72	
	P265/70R17	115T	OWL	8.0	9.5	12.0	272	804	300/44	E	B	72	
	P275/65R17	115T	OWL	8.0	9.5	12.0	279	791	300/44	E	B	72	
	LT235/75R15	104/101S	OWL	6.5	11.5	14.4	233	733	350/51	E	B	72	
	31X10.50R15LT	109S	OWL	8.5	11.5	14.4	268	775	350/51	E	B	72	
	15'	215/70R15C	109/107R	BSW	6.0	8.2	10.5	221	683	450/65	C	C	72
215R15C		112/110S	BLK	6.0	9.0	11.0	218	724	450/65	E	C	72	
245/75R15C		109/107S	BLK	7.0	11.5	14.0	248	749	375/55	C	C	72	
255/70R15C		112/110S	BLK	8.0	12.0	16.0	270	810	550/80	C	C	72	
LT215/85R16		115/112S	OWL	6.0	11.5	14.4	216	772	550/80	C	C	72	
LT225/75R16		115/112S	OWL	6.0	11.5	14.4	223	744	550/80	C	C	72	
LT235/85R16		120/116S	BLK	6.5	12.0	15.0	235	806	550/80	C	C	72	
LT245/75R16		120/116S	OWL	7.0	11.5	14.4	248	774	550/80	C	C	72	
LT265/75R16		123/120S	OWL	7.5	12.0	15.0	267	804	550/80	-	-	-	
LT285/75R16		122/119S	OWL	8.0	12.0	15.0	286	834	450/65	-	-	-	
15'	205R16C	110/108S	BLK	5.5	11.5	14.4	200	738	375/55	C	C	72	
	185/75R16C	104/102S	BLK	5.0	9.0	11.4	184	684	475/69	C	C	72	
	LT245/75R17	121/118S	OWL	7.0	12.0	15.0	248	800	550/80	C	C	72	
	LT265/70R17	121/118S	OWL	8.0	12.0	15.0	272	804	550/80	C	C	72	
	17'	LT275/65R18	123/120S	BLK	8.0	11.5	16.0	279	815	550/80	-	-	-
		LT275/70R18	125/122S	BLK	8.0	11.5	16.0	279	843	550/80	-	-	-
	18'	P275/55R20	117TXL	BLK	8.5	11.5	16.0	284	810	340/50	E	B	73
		P275/60R20	119TXL	BLK	8.0	11.5	16.0	279	838	340/50	E	B	73



# POWER ROVER M/T

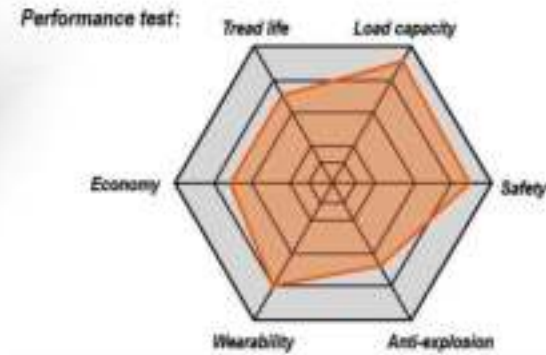

Three main zigzag grooves and aggressive pattern design provide outstanding traction on all kinds of road conditions.

The blocks read design with multiple-sipes provide outstanding off-road traction and reduce tread damage on off-road condition. Special casing profile and solid shoulder pattern enhance the max traction and cornering performance.



High void ratio and open shoulder offer excellent resistance to aquaplaning and self-cleaning performance.


Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	OA.diameter MM	Max Pressure kPa/Psi	POR
15'	31x10.50R15LT	109Q	RBL	8.5	13.5	16.8	268	775	350/51	POR
	33x12.50R15LT	108Q	RBL	10.0	13.5	16.8	320	838	350/51	POR
	35x12.50R15LT	113Q	RBL	10.0	14.5	18.2	326	890	350/51	POR
16'	LT235/85R16	120/116Q	RBL	6.5	13.5	16.8	235	806	550/80	POR
	LT245/75R16	120/116Q	RBL	7.0	13.5	16.8	248	771	550/80	POR
	LT265/75R16	123/120Q	RBL	7.5	13.5	16.8	267	804	550/80	—
	LT285/75R16	126/123Q	RBL	8.0	13.5	16.8	286	834	550/80	—
	LT305/70R16	124/121Q	BSW	9.0	13.5	16.8	311	840	450/65	—
17'	LT315/75R16	127/124Q	BSW	8.5	13.5	16.8	313	884	450/65	—
	LT265/70R17	121/118Q	RBL	8.0	13.5	16.8	272	804	550/80	—
	LT285/70R17	126/123Q	RBL	8.5	13.5	16.8	284	831	550/80	POR
	LT33x12.50R17	114Q	BSW	10.0	13.5	16.8	318	832	350/50	—
	35x12.50R17LT	121Q	BSW	10.0	13.2	16.6	318	883	450/65	POR
18'	37x12.50R17LT	124Q	BSW	10.0	13.2	16.6	318	934	350/50	—
	33x12.50R18LT	118Q	BSW	10.0	13.2	16.6	318	832	450/65	POR
	35x12.50R18LT	123Q	BSW	10.0	13.2	16.6	318	883	450/65	POR

M/T



# POWER ROVER M/T II

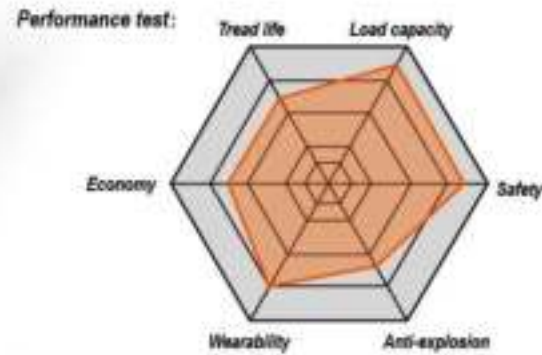

Three main zigzag grooves and aggressive pattern design provide outstanding traction on all kinds of road conditions.

The blocks road design with multiple-sipes provide outstanding off-road traction and reduce tread damage on off-road condition. Special casing profile and solid shoulder pattern enhance the max traction and cornering performance.



High void ratio and open shoulder offer excellent resistance to aquaplaning and self-cleaning performance.

Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	OA diameter MM	Max Pressure kPa/Psi
20'	33x12.50R20LT	114Q	BSW	15.0	14.2	17.9	318	826	450/65
	35x12.50R20LT	121Q	BSW	15.0	14.2	17.9	318	877	450/66
22'	35x12.50R22LT	117Q	BSW	16.8	14.2	17.9	318	877	450/67
	37x12.50R22LT	123Q	BSW	16.8	14.2	17.9	318	928	450/68





**VAN**




**VANTOUR**



**LOADKING**



# VANTOUR

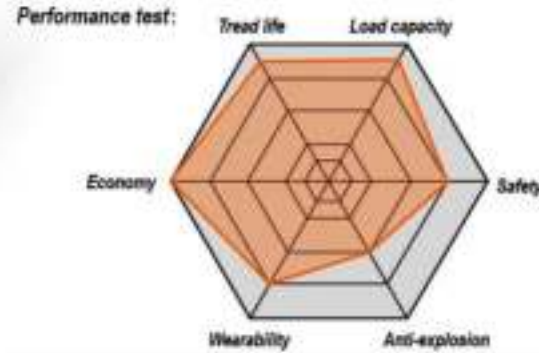

### M+S

RIM SIZE	12 - 16
SPEED RATING	Q - T

Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all kinds of road conditions.

Variable pitch patterns and multi-knife-cut tread pattern reduce vibration to offer the comfort and quiet ride.



Continuous tread patterns on shoulder and solid shoulder ribs provide responsive handling and even wear.

Reinforced structure and special abrasion-resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	O.A.diameter MM	Max Pressure kPa/Psi	RR	WG	SL
12'	145R12C	86/84Q	BSW	4.0	7.0	9.0	147	542	450/65	C	B	72
	155R12C	88/86Q-8PR	BLK	4.5	8.0	10.0	157	55	450/65	C	B	72
13'	155R13C	90/88Q-8PR	BLK	4.5	8.0	10.0	157	578	450/65	C	B	72
	155R13C	85/83Q-6PR	BSW	4.5	7.8	10.0	157	578	350/50	C	B	72
	165R13C	91/89R-6PR	BSW	4.5	7.8	10.0	167	596	375/55	C	B	72
	165/70R13C	88/86S-6PR	BSW	5.0	7.8	10.0	170	562	375/55	C	B	72
14'	165/70R14C	89/87R-6PR	BLK	5.0	8.0	10.0	170	588	375/55	C	B	72
	175/65R14C	90/88T-6PR	BLK	5.0	8.4	11.0	177	584	375/55	C	B	72
	175/70R14C	95/93S-8PR	BSW	5.0	7.8	10.0	177	602	375/55	C	B	72
	175R14C	99/98R-8PR	BSW	5.0	7.8	10.0	178	634	450/65	C	B	72
	185R14C	102/100R	BLK	5.5	8.5	10.8	188	650	450/65	C	B	72
	195R14C	106/104R	BLK	5.5	8.5	10.8	198	666	450/65	C	B	72
15'	205R14C	109/107R-8PR	BSW	3.0	8.2	10.5	208	686	450/65	C	B	72
	195R15C	106/104R	BLK	5.5	8.5	10.8	198	693	450/65	C	B	72
	195/70R15C	104/102R	BLK	6.0	9.0	11.4	201	655	450/65	C	B	72
	205/70R15C	106/104R	BLK	6.0	9.0	11.4	209	669	450/65	C	B	72
	215/65R15C	104/102R	BLK	6.5	8.8	11.0	221	661	375/55	C	B	72
	215/70R15C	109/107R	BLK	6.5	9.5	11.8	221	683	450/65	C	B	72
	225/70R15C	112/110R	BLK	6.5	9.5	11.8	228	697	450/65	C	B	72
	175/75R16C	101/99R	BLK	5.0	9.0	11.4	175	668	475/69	C	B	72
16'	185/75R16C	104/102R	BLK	5.0	9.0	11.4	184	684	475/69	C	B	72
	195/65R16C	104/102R	BLK	6.0	9.0	11.4	201	660	475/69	C	B	72
	195/75R16C	107/105R	BLK	5.5	9.0	11.4	196	698	475/69	C	B	72
	205/65R16C	107/105T	BLK	6.0	9.0	11.4	209	672	475/69	C	B	72
	205/75R16C	110/108R	BLK	5.5	9.0	11.4	203	714	475/69	C	B	72
	215/65R16C	109/107T	BLK	6.5	9.5	11.8	221	664	475/69	C	B	72
	215/75R16C	113/111R	BLK	6.0	9.5	11.8	216	728	475/69	C	B	72
	225/65R16C	112/110T	BLK	6.5	9.5	11.8	228	698	475/69	C	B	72
235/65R16C	115/113R	BLK	7.0	9.5	11.8	240	712	475/69	C	B	72	



# LOADKING



Economical




Braking



Mileage

Performance test:

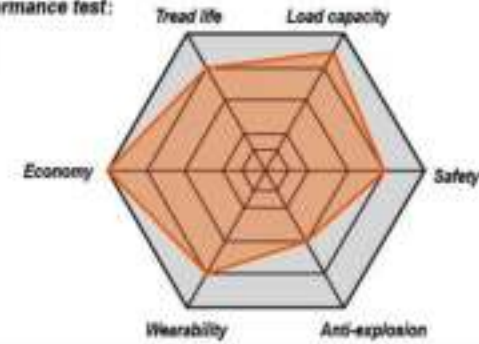

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	OA.diameter MM	Max Pressure kPa/Psi	RR	WG	SL
16'	185/75R16C	104/102R	BLK	5.0	9.0	11.4	184	684	475/69	C	B	71
	195/75R16C	107/105R	BLK	5.5	9.5	11.4	196	698	475/69	C	B	71

VAN

All-season tread design with long tread life.



Double-ply casing construction handles heavy loads at highway speed and delivers outstanding durability.

Double steel belts plies and double full joint-less nylon cap plies improve handling stability and durability.

Wide circumferential grooves help to evacuate water quickly and efficiently.





**White Sidewall**




**VANMARCH**



**ROADTOUR**



# VANMARCH

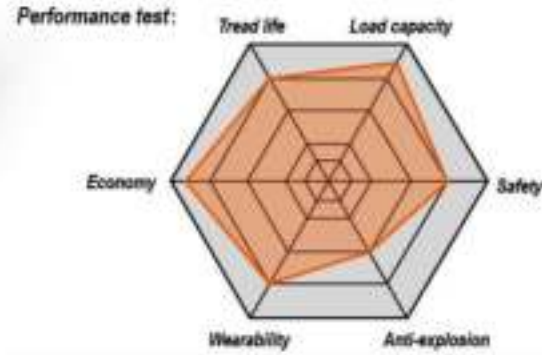

## M+S

RIM SIZE	13 - 15
SPEED RATING	R

Reinforced structure and special abrasion resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.

Continuous tread patterns on shoulder and solid shoulder ribs responsive handling and even wear.



Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all kind of road conditions.


White sidewall rib shows extraordinary appearance.

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	OA diameter MM	Max Pressure kPa/Psi
13'	155R13C	85/83R	WSW	4.5	8.0	10.0	157	578	350/51
	155R13C	90/88R	WSW	4.5	8.0	10.0	157	578	450/65
	165R13C	91/89R-6PR	BSW	4.5	7.8	10.0	167	596	450/55
14'	185R14C	102/100R	WSW	5.5	8.5	10.8	188	650	450/65
	195R14C	106/104R	WSW	5.5	8.5	10.8	198	666	450/65
	205/75R14C	109/107R	WSW	5.5	8.5	10.8	203	664	475/69
15'	185R15C	103/102R	WSW	5.5	8.5	10.8	188	674	450/65
	195R15C	106/104R	WSW	5.5	8.5	10.8	198	693	450/65
	205/75R15C	109/107R	WSW	5.5	8.5	10.8	203	689	475/69

White Sidewall



# ROADTOUR

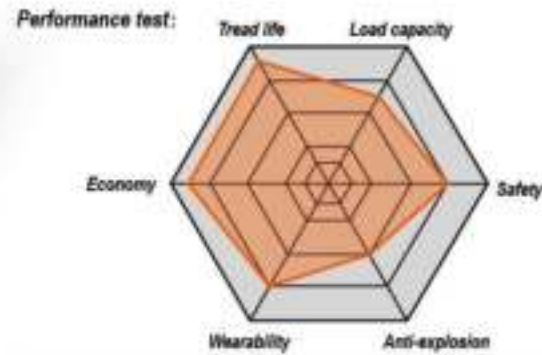

### M+S

RIM SIZE	14 - 15
SERIES	70 - 75
SPEED RATING	S - T

Four main grooves provide good stability and wet performance.

Special tread compound, ensure tire performance stability in all kinds of weather conditions.



Reasonable pattern area, perfect collocation of every grooves.

White side wall rib shows extraordinary appearance.

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	O.A.diameter MM	Max Pressure kPa/Psi
14'	P195/75R14	92S	WSW	5.0	8.5	10.8	196	648	300/44
	P205/75R14	95S	WSW	5.5	8.5	10.8	203	664	300/44
	P205/70R15	95S	WSW	6.0	8.5	10.8	209	669	300/44
15'	P205/75R15	97T	WSW	5.5	8.5	10.8	203	689	300/44
	P215/75R15	100T	WSW	6.0	8.5	10.8	216	703	300/44
	P225/70R15	100T	WSW	6.5	8.5	10.8	228	697	300/44
	P225/75R15	102T	WSW	6.0	8.5	10.8	223	719	300/44
	P235/75R15	105S	WSW	6.5	8.5	10.8	235	733	300/44

White Sidewall





**4-SEASON**




**POWERMARCH A/S**





# POWERMARCH A/S

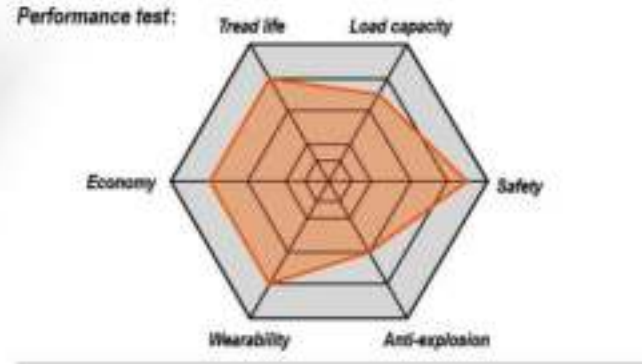

**M+S**

RIM SIZE	13 - 18
SERIES	40 - 80
SPEED RATING	T - Y

Four wide circumferential tread grooves, effectively improve the wet performance, ensure excellent handling performance under raining and snowing weather.

Asymmetric pattern design, the middle block, effectively enhances the traction and safety on snow and ice road.



Tread formula takes the four seasons driving conditions and climate conditions into account, driving control performance is excellent and stable, unobstructed Four Seasons.

The corrugated steel sipes on the blocks reduce the rigidity of blocks and improve the comfort when driving.

4-SEASON

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	O.A.diameter MM	Max Pressure kPa/Psi	RR	WG	SL
13"	155/65R13	73T	BSW	5.0	6.8	8.6	155	532	300/44	E	C	71
	155/70R13	75T	BSW	5.0	6.8	8.6	155	548	300/44	E	C	71
	155/80R13	79T	BSW	5.0	6.8	8.6	155	578	300/44	E	C	71
	165/70R13	79T	BSW	5.0	6.8	8.6	165	562	300/44	E	C	71
	175/65R13	80T	BSW	5.00B	7.6	9.6	177	558	300/44	E	C	71
14"	175/70R13	82T	BSW	5.00B	7.6	9.6	177	576	300/44	E	C	71
	155/65R14	75H	BSW	5.0	6.8	8.6	155	558	300/44	E	C	71
	165/60R14	75H	BSW	5.0	6.8	8.6	165	554	300/44	E	C	71
	165/65R14	79H	BSW	5.0	6.8	8.6	165	570	300/44	E	C	71
	165/70R14	81H	BSW	5.0	6.8	8.6	165	588	300/44	E	C	71
	175/65R14	82H/86TXL	BSW	5.0	7.3	9.2	175	584	340/50	E	C	71
	175/70R14	84H/88TXL	BSW	5.0	9.5	12.0	175	602	340/50	E	C	71
	185/55R14	80H	BSW	6J	7.8	9.9	194	560	300/44	E	C	71
	185/60R14	82H	BSW	5.0	10.0	12.6	185	578	300/44	E	C	71
	185/65R14	86H	BSW	5.0	7.3	9.2	185	596	300/44	E	C	71
15"	185/70R14	88H	BSW	5 1/2J	7.8	9.9	189	616	300/44	E	C	71
	175/55R15	77H	BSW	5.0	9.5	12.0	175	573	300/44	E	C	71
	175/60R15	81H	BSW	5.0	9.5	12.0	175	591	300/44	E	C	71
	175/65R15	84H/88TXL	BSW	5.0-6.0	11.0	13.9	175	609	300/44	E	C	71
	185/55R15	82V	BSW	5.0-6.5	11.0	13.9	185	585	300/44	E	C	71
	185/60R15	84H/88HXL	BSW	5.0-6.5	11.0	13.9	185	603	340/50	E	C	71
	185/65R15	88H/92TXL	BSW	5.0-6.5	11.0	13.9	185	621	340/50	E	C	71
	195/50R15	82V	BSW	6.0	9.5	12.0	195	577	300/44	E	C	72
	195/55R15	85V	BSW	6.0	9.0	11.3	195	595	300/44	E	C	72
	195/60R15	88H	BSW	5.5-7.0	11.0	13.9	195	615	300/44	E	C	72
	195/65R15	91H/95HXL	BSW	5.5-7.0	11.0	13.9	195	635	300/44	E	C	72
	205/65R15	94V	BSW	6J	7.8	9.9	209	647	300/44	E	C	72
	215/65R15	96H	BSW	6 1/2J	7.8	9.9	221	661	300/44	E	C	72
	195/55R16	91VXL	BSW	6.0	9.0	11.3	195	620	340/50	E	C	72
	16"	205/55R16	94VXL	BSW	6.5	7.5	9.4	205	632	340/50	E	C
205/60R16		96HXL	BSW	6.0	9.5	12.0	205	652	340/50	E	C	72
215/55R16		97VXL	BSW	6.5	10.0	12.6	215	642	340/50	E	C	72
215/60R16		99HXL	BSW	6.5	6.5	8.2	215	664	340/50	E	C	72
215/65R16		102HXL	BSW	6.5	11.5	14.5	215	686	340/50	E	C	72
195/45R16		84V XL	BSW	6 1/2J	7.8	9.9	195	582	340/50	E	C	72
195/50R16		88V XL	BSW	6J	7.8	9.9	201	602	340/50	E	C	72
205/45R16		87W XL	BSW	7J	7.8	9.9	206	590	340/50	E	C	72
215/45R16		90VXL	BSW	7J	7.8	9.9	213	600	340/50	E	C	72
215/70R16		100H	BSW	6 1/2J	7.8	9.9	221	708	300/44	E	C	72
225/55R16		99W XL	BSW	7J	7.8	9.9	233	654	340/50	E	C	72
205/45R17		88W XL	BSW	7J	7.8	9.9	206	616	340/50	E	C	72
205/50R17		93W XL	BSW	6 1/2J	7.8	9.9	214	638	340/50	E	C	72
215/45R17		91W XL	BSW	7J	7.8	9.9	213	626	340/50	E	C	72
215/50R17		95W XL	BSW	7J	7.8	9.9	226	648	340/50	E	C	72
215/55R17	98W XL	BSW	7J	7.8	9.9	226	668	340/50	E	C	72	
17"	215/60R17	100V XL	BSW	6 1/2J	7.8	9.9	221	690	340/50	E	C	72
	225/45R17	94WXL	BSW	8.0	9.5	12.0	225	634	340/50	E	C	72
	225/50R17	98WXL	BSW	7.0	7.2	9.1	225	658	340/50	E	C	72
	225/55R17	101W XL	BSW	7J	7.8	9.9	233	680	340/50	E	C	72
	225/60R17	103V XL	BSW	6 1/2J	7.8	9.9	228	702	340/50	E	C	72
	225/65R17	106V XL	BSW	6 1/2J	7.8	9.9	228	724	340/50	E	C	72
	235/45R17	97W XL	BSW	8J	7.8	9.9	236	644	340/50	E	C	72
	235/55R17	103W XL	BSW	7 1/2J	7.8	9.9	245	690	340/50	E	C	72
	235/65R17	108V XL	BSW	7J	7.8	9.9	240	738	340/50	E	C	72
	225/40ZR18	92Y XL	BSW	8J	7.8	9.9	230	637	340/50	E	C	72
18"	225/45R18	95W XL	BSW	7 1/2J	7.8	9.9	225	659	340/50	E	C	72
	225/55R18	102V XL	BSW	7J	7.8	9.9	233	680	340/50	E	C	72
	235/50R18	101W XL	BSW	7 1/2J	7.8	9.9	245	693	340/50	E	C	72
	245/40ZR18	97Y XL	BSW	8 1/2J	7.8	9.9	248	653	340/50	E	C	72
	245/45ZR18	100Y XL	BSW	8J	7.8	9.9	243	677	340/50	E	C	72





# SNOW



**SNOWTOUR**

**SNOW STAR**

**SNOWMARCH**




**SNOWMARCH  
STUD**



**Ice X pro**



# SNOWTOUR

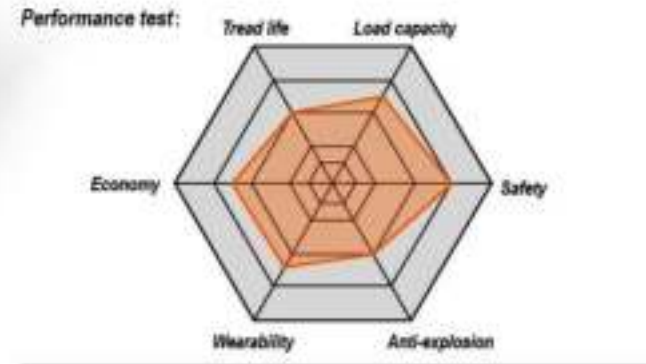

### M+S

RIM SIZE	13 - 20
SERIES	55 - 75
SPEED RATING	R - H

Central straight & Z wide Zig-Zag circumferential grooves, with the design of convexes in the bottom, improve the traction, shorten braking distance and increase the stability on the snow road.

Bionic tread pattern design makes whole tread blocks' s tiffness more with the optimized deployment of "Z" shape sipes, provide great grip on snow & ice conditions.



Wide rolling tread, by using computer-optimized design, makes sure enough contact area for more grip. The wide open shoulder grooves prevent aquaplaning with enhanced wet grip and provide excellent water & snow evacuation.


Special tread compound remains flexible at lower temperatures to make sure the grip on winter road conditions, while reduce the rolling resistance.

SNOW

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	O.A.diameter MM	Max Pressure kPa/Psi	RR	WG	SL
13'	175/70R13	82T	BLK	5.0	8.0	10.0	177	576	300/44	E	C	71
	155/65R14	75T	BLK	4.5	8.0	10.0	154	557	300/44	E	C	71
	165/60R14	75T	BLK	5.0	8.0	10.0	170	554	300/44	E	C	71
	165/65R14	79T	BLK	5.0	8.0	10.0	170	570	300/44	E	C	71
	165/70R14	85TXL	BLK	5.0	8.0	10.0	170	588	340/50	E	C	71
14'	175/65R14	82T	BLK	5.0	8.0	10.0	177	584	300/44	E	C	71
	175/70R14	88TXL	BLK	5.0	8.0	10.0	177	602	340/50	E	C	71
	185/60R14	82T	BLK	5.5	8.0	10.0	189	578	300/44	E	C	71
	185/65R14	86T	BLK	5.5	8.0	10.0	189	609	300/44	E	C	71
	185/70R14	92TXL	BLK	5.5	8.0	10.0	189	616	340/50	E	C	71
15'	195/70R14	95TXL	BLK	6.0	8.0	10.0	201	630	340/50	E	C	72
	175/65R15	84T	BLK	5.0	8.5	11.0	177	609	300/44	E	C	71
	185/55R15	82H	BLK	6.0	8.5	11.0	194	585	300/44	E	C	71
	185/60R15	88HXL	BLK	5.5	8.0	10.0	189	603	340/50	E	C	71
	185/65R15	88H	BLK	5.5	8.0	10.0	189	621	300/44	E	C	71
	195/60R15	88H	BLK	6.0	8.5	10.8	201	615	300/44	E	C	72
	195/65R15	95TXL	BSW	6J	8.3	10.0	201	635	340/50	E	C	72
	205/65R15	94H	BLK	6.0	8.5	10.8	209	647	300/44	E	C	72
	215/70R15	98T	BLK	6.5	8.5	10.8	221	683	300/44	E	C	72
	205/55R16	91H	BLK	6.5	8.5	10.8	214	632	300/44	E	C	72
16'	205/60R16	96HXL	BLK	6.0	8.5	10.8	209	652	340/50	E	C	72
	215/60R16	99HXL	BLK	6.5	8.5	10.8	221	664	340/50	E	C	72
	215/65R16	98H	BLK	6.5	8.5	10.8	221	686	300/44	E	C	72
	215/70R16	100T	BLK	6.5	8.5	10.8	217	708	300/44	E	C	72
	225/60R16	98H	BLK	6.5	8.5	10.8	228	676	300/44	E	C	72
	225/65R16	100H	BLK	6.5	8.5	11.0	228	689	300/44	E	C	72
	225/70R16	107TXL	BLK	6.5	8.5	11.4	228	722	300/44	E	C	72
	235/65R16	103H	BLK	7.0	8.5	13.0	240	712	300/44	E	C	72
	235/70R16	106T	BLK	7.0	9.0	11.4	240	736	300/44	E	C	72
	245/70R16	111TXL	BLK	7.0	9.0	11.4	248	750	340/50	E	C	72
17'	265/70R16	112T	BLK	8.0	9.0	11.4	272	778	300/44	E	C	73
	215/60R17	96H	BLK	6.5	9.0	11.4	221	690	300/44	E	C	72
	215/65R17	99H	BLK	6.5	9.0	11.4	221	710	300/44	E	C	72
	225/60R17	99H	BLK	6.5	9.0	11.4	228	702	300/44	E	C	72
	225/65R17	102T	BLK	6.5	9.0	11.0	228	724	300/44	E	C	72
	235/65R17	108TXL	BLK	7.0	9.0	11.4	240	738	340/50	E	C	72
	245/65R17	111TXL	BLK	7.0	9.0	11.4	248	750	340/50	E	C	72
	265/65R17	112T	BLK	8.0	9.0	11.4	272	776	300/44	E	C	73
	265/70R17	115T	BLK	8.0	9.0	14.4	272	804	300/44	E	C	73
	275/55R20	117HXL	BSW	8 1/2J	8.5	12.6	204	810	340/50	E	C	73
15'	275/60R20	119HXL	BSW	8J	8.5	10.7	279	838	340/50	-	-	-
	195/70R15C	104/102R	BLK	6.0	9.5	12.0	201	655	450/65	C	C	73
	215/70R15C	109/107R	BLK	6.5	10.0	12.0	221	683	450/65	C	C	73
	215/65R15C	104/102R	BLK	6.5	9.5	12.0	221	661	375/55	C	C	73
	225/70R15C	112/110R	BSW	6 1/2J	9.2	11.6	228	697	450/65	-	-	-
	215/75R16C	113/111R	BLK	6.0	9.5	12.0	216	728	475/69	C	C	73
	225/70R15C	112/110R	BLK	6.5	10.0	12.6	228	697	450/65	C	C	73
	185/75R16C	104/102R	BLK	5.0	9.5	12.0	184	684	475/69	C	C	73
	195/65R16C	104/102R	BLK	6.0	9.5	12.0	201	660	475/69	C	C	73
	195/75R16C	107/105R	BLK	5.5	9.5	12.0	196	698	475/69	C	C	73
16'	205/65R16C	107/105R	BLK	6.0	9.5	12.0	209	672	475/69	C	C	73
	215/65R16C	109/107R	BLK	6.5	10.0	12.6	221	686	475/69	C	C	73
	225/65R16C	112/110R	BLK	6.5	10.0	12.6	228	698	475/69	C	C	73
	235/65R16C	115/113R	BLK	7.0	10.0	11.4	240	712	475/69	C	C	73
	LT225/75R16	115/112S	BLK	6.0	11.5	14.4	223	744	550/80	C	C	73
17'	LT245/75R16	120/116S	BLK	7.0	11.5	12.6	248	774	550/80	C	C	73
	LT245/70R17	119/116S	BSW	7J	10.7	13.4	248	776	550/80	-	-	-
	LT265/70R17	121/118S	BSW	8J	10.7	13.4	272	804	550/80	-	-	-
18'	LT275/65R18	123/120S	BSW	8J	10.7	13.4	279	815	550/80	-	-	-
	LT275/70R18	125/122S	BSW	8J	10.7	13.4	279	843	550/80	-	-	-



# SNOW STAR

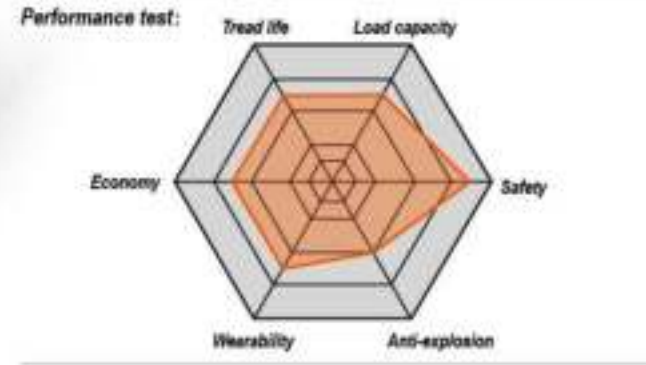

### M+S

RIM SIZE	13 - 20
SERIES	40 - 70
SPEED RATING	T - H

Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance. The optimized deployment of "Z" shape sipes, provide great grip on snow & ice conditions.

Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.



Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.


Special tread compound remains flexible at lower temperatures to make sure the grip on winter road conditions and reduce the rolling resistance.

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	OA. diameter MM	Max Pressure kPa/Psi	RR	WG	SL
13'	165/70R13	79T	BSW	5	7.8	9.8	170	562	300/44	E	E	71
14'	185/60R14	82T	BSW	5.5	8.3	10.5	189	578	300/44	E	E	71
	195/50R15	82H	BLK	6.0	8.5	10.8	201	577	300/44	E	E	72
	195/55R15	85H	BLK	6.0	8.5	10.8	201	596	300/44	E	E	72
15'	195/60R15	88H	BLK	6.0	8.5	10.8	201	615	300/44	E	E	72
	195/65R15	91H	BLK	6.0	8.5	10.8	201	635	300/44	E	E	72
	195/65R15	91T	BSW	6	8.3	10.5	201	635	300/44	E	E	72
	195/65R15	95TXL	BSW	6J	8.3	-	201	635	340/50	E	E	72
	195/55R16	91HXL	BLK	6.0	8.5	10.8	190	619	340/50	E	E	72
16'	205/55R16	91H	BSW	6.5	8.3	10.5	214	632	300/44	E	E	72
	205/55R16	94HXL	BLK	6.5	8.5	10.8	214	632	340/50	E	E	72
	215/55R16	97HXL	BLK	7.0	8.5	10.8	223	642	340/50	E	E	72
	225/55R16	99HXL	BLK	7.0	8.5	10.8	233	680	340/50	E	E	72
	205/45R17	88HXL	BLK	7.0	8.5	10.8	206	616	340/50	—	—	—
	205/50R17	93HXL	BLK	6.5	8.5	10.8	214	638	340/50	E	E	72
	215/45R17	91HXL	BLK	7.0	8.5	10.8	231	626	340/50	—	—	—
	215/50R17	95HXL	BLK	7.5	8.5	10.8	245	719	340/50	E	E	72
17'	215/55R17	98HXL	BLK	7.0	8.5	10.8	226	668	340/50	E	E	72
	225/45R17	94HXL	BLK	7.5	8.5	10.8	225	634	340/50	E	E	72
	225/50R17	98HXL	BLK	8.0	8.5	10.8	265	739	340/50	E	E	72
	225/55R17	101HXL	BLK	7.0	8.5	10.8	233	680	340/50	E	E	72
	235/45R17	97HXL	BLK	7.5	8.5	10.8	236	644	340/50	E	E	72
	235/55R17	103HXL	BLK	7.5	8.5	10.8	245	690	340/50	E	E	72
	225/40R18	92HXL	BLK	8.5	8.5	10.8	234	637	340/50	E	E	72
	225/45R18	95HXL	BSW	7.5	8.2	10.4	225	659	340/50	E	E	72
	245/45R18	100HXL	BLK	8.0	8.5	10.8	243	677	340/50	E	E	72
18'	255/55R18	109HXL	BLK	8.0	8.5	10.8	265	737	340/50	E	E	73
	235/45R18	98HXL	BSW	8J	8.2	10.3	236	669	340/50	E	E	72
	235/55R18	104HXL	BLK	7.5	8.5	11.0	245	715	340/50	E	E	72
	235/60R18	107HXL	BLK	7.0	8.5	11.0	240	739	340/50	E	E	72
	245/60R18	105H	BLK	7.0	8.5	11.0	248	751	340/50	E	E	72
	235/55R19	105HXL	BSW	7 1/2J	8.2	10.3	245	741	300/44	E	E	72
19'	245/45R19	102HXL	BSW	8J	8.2	10.3	243	703	340/50	E	E	72
	255/50R19	107HXL	BLK	8.0	8.5	11.0	265	739	340/50	E	E	73
	255/55R19	111HXL	BLK	8.0	8.5	11.0	265	763	340/50	E	E	73
20'	275/40R20	106HXL	BLK	9.5	8.5	11.0	278	728	340/50	E	E	73
	275/45R20	110HXL	BLK	9.0	8.5	11.0	273	756	340/50	E	E	73
	275/55R20	117HXL	BSW	8 1/2J	8.5	11.0	284	810	340/50	—	—	—

SNOW



# SNOWMARCH

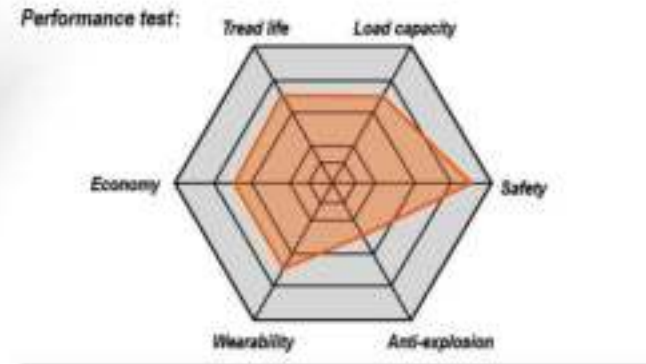

### M+S

RIM SIZE	12 - 21
SERIES	45 - 75
SPEED RATING	R - H

Two broad longitudinal plus two curved wide gutters, effectively improve the performance of the tire wetland drainage, to ensure the excellent handling performance on rain-snow road.

Asymmetric pattern design, the pattern block in the middle, effectively enhances the traction and safety performance on snow-ice road.




A new generation of tread pattern design, lower temperature tread formulation, softer than the previous generation of tread with Shao's hardness.

A large number of corrugated steel block on the pattern, maintains maneuverability when contacting the road, and sharp edges can significantly enhance the traction in slippery and ice road.

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	O.A.diameter MM	Max Pressure kPa/Psi	RR	WG	SL
12"	145/70R12	69T	BLK	—	8.0	10.1	150	509	300/44	E	C	71
	175R14C	99/98R	BLK	5.0	8.5	10.7	175	634	450/65	—	—	—
14"	185R14C	102/100R	BLK	5.5	8.5	10.7	188	650	450/65	—	—	—
	195/60R14	86H	BLK	—	8.5	10.7	201	590	300/44	E	C	72
15"	215/75R15	100T	BLK	6.5	8.5	10.7	216	703	300/44	E	C	72
	195/60R16	89H	BLK	6.0	8.5	10.7	201	640	300/44	E	C	72
16"	205/55R16	91H	BLK	6.5	8.5	10.7	214	632	300/44	E	C	72
	225/55R17	101HXL	BLK	7.0	8.5	10.7	233	680	340/50	E	C	72
17"	225/65R17	102TL	BLK	6.5	8.5	10.7	228	724	300/44	E	C	72
	215/55R18	95H	BLK	7.0	8.5	10.7	226	693	300/44	E	C	72
18"	225/60R18	100H	BLK	6.5	8.5	10.7	228	727	300/44	E	C	72
	265/60R18	110T	BLK	8.0	8.5	10.7	272	775	300/44	E	C	73
18"	285/60R18	116T	BLK	8.5	8.5	10.7	292	799	300/44	E	C	73
	235/55R19	105HXL	BLK	7.5	8.5	10.7	245	714	340/50	E	C	72
19"	245/55R19	107HXL	BLK	7.5	8.5	10.7	253	753	340/50	E	C	72
	245/45R20	103HXL	BLK	8.0	8.5	10.7	253	754	300/44	E	C	72
20"	245/50R20	102H	BLK	7.5	8.5	10.7	243	728	340/50	E	C	73
	255/55R20	110HXL	BLK	8.0	8.5	10.7	265	788	340/50	E	C	73
20"	285/50R20	116HXL	BLK	9.0	8.8	11.1	297	794	340/50	E	C	75
	275/45R21	110HXL	BLK	—	8.8	11.1	273	781	340/50	—	—	—



# SNOWMARCH STUD

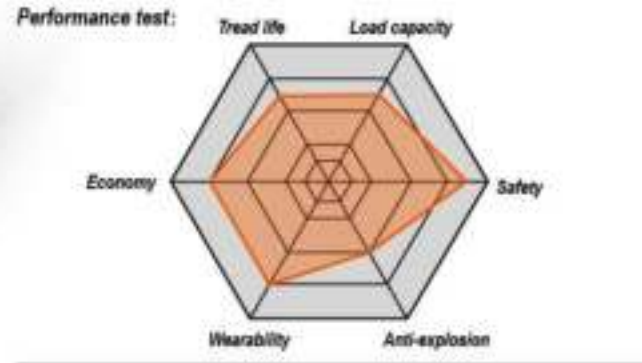

## M+S

RIM SIZE	14 - 17
SERIES	45 - 75
SPEED RATING	R - H

Special tread design, deep shoulder pattern depth, ensure effective self-cleaning and snow-ouing.

A large number of corrugated steel sipes on the block, maintain maneuverability when touching the pavement, and the sharp edge can significantly enhance the traction on wet-slippery and snow-ice road.



The single-directional wide "V" type longitudinal groove effectively enhances the performance on the ice-wet road.


Studded pattern design effectively improves the traction and safety performance on ice and snow road.

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	OA.diameter MM	Max Pressure kPa/Psi	RR	WG	SL
14"	175/65R14	86TXL	BSW	5.0	7.3	9.0	7.3	584	350/51	E	C	71
	185/65R14	90TXL	BSW	5.5	7.3	9.0	7.3	610	350/51	E	C	71
	185/60R15	88TXL	BSW	5.5	7.3	9.0	7.3	610	350/51	E	C	71
15"	185/65R15	92TXL	BSW	5.5	9.5	12.0	9.5	610	350/51	E	C	71
	195/60R15	92TXL	BSW	6.0	9.5	12.0	9.5	610	350/51	E	C	72
	195/65R15	95TXL	BSW	6.0	9.0	11.0	9.0	635	350/51	E	C	72
16"	205/55R16	94TXL	BSW	6.5	7.5	9.0	7.5	635	350/51	E	C	72
	205/60R16	96TXL	BSW	6.0	9.5	12.0	9.5	660	350/51	E	C	72
	215/60R16	99TXL	BSW	6.5	10.0	13.0	10.0	660	350/51	E	C	72
16"	215/65R16	102TXL	BSW	6.5	6.5	9.0	6.5	686	350/51	E	C	72
	215/70R16	100T	BSW	6.5	11.5	14.0	11.5	711	300/44	E	C	72
	225/60R16	102TXL	BSW	6.5	9.5	12.0	9.5	686	350/51	E	C	72
16"	225/65R16	104TXL	BSW	6.5	11.5	14.0	11.5	711	300/44	E	C	72
	235/70R16	106T	BSW	7.0	11.5	14.0	11.5	737	340/50	E	C	72
	215/55R17	98HXL	BSW	7.0	9.0	11.0	9.0	60	340/50	E	C	72
17"	215/60R17	100HXL	BSW	6.5	10.0	13.0	10.0	686	300/44	E	C	72
	225/45R17	94HXL	BSW	7.5	9.5	12.0	9.5	635	350/51	E	C	72
	225/50R17	98HXL	BSW	8.0	9.5	12.0	9.5	660	350/51	E	C	72
17"	225/55R17	101HXL	BSW	7.0	7.2	9.0	7.2	689	350/51	E	C	72
	225/60R17	103HXL	BSW	6.5	10.0	13.0	10.0	711	300/44	E	C	72
	225/65R17	106TXL	BSW	6.5	11.5	14.0	11.5	737	300/44	E	C	72
16"	235/65R17	108TXL	BSW	7.0	11.5	14.0	11.5	737	300/44	E	C	72
	245/65R17	111TXL	BSW	7.0	11.5	14.0	11.5	762	300/44	E	C	72
	265/70R17	115T	BSW	8.0	13.5	17.0	13.5	813	550/80	E	C	73
16"	185/75R16C	104/102R	BSW	5.0	9.0	11.4	9.0	684	475/69	E	C	72
	235/65R16C	115/113R	BSW	7.0	11.5	14.0	11.5	711	300/44	E	C	72
	LT225/75R16	115/112S	BSW	6.0	11.5	14.0	11.5	737	300/44	-	-	-
17"	LT245/75R16	120/116S	BSW	7.0	11.5	14.0	11.5	762	300/44	-	-	-
	LT245/70R17	119/116S	BSW	7.0	11.5	14.0	11.5	787	300/44	-	-	-
17"	LT265/70R17	121/118S	BSW	8.0	12.7	19.0	12.7	813	550/80	-	-	-

MONS



# Ice X pro

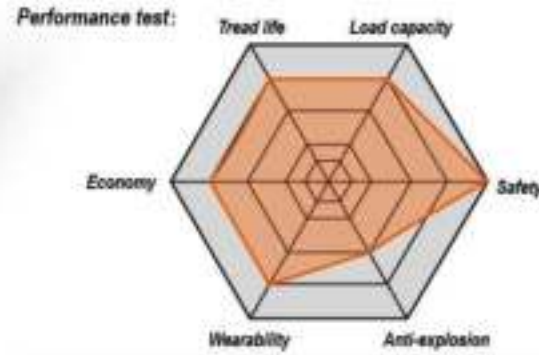

### M+S

RIM SIZE	13 - 17
SERIES	45 - 75
SPEED RATING	S

Multi-directional groove distribution design  
It is helpful to improve the stability of driving in ice surface and improve driving safety.

High-density 3D steel blade design  
While ensuring the softness of the grounding surface of the tire, the overall block strength is improved to ensure super grip and reduce driving lag.



Diamond cut corner design  
It can effectively break through the water film, steadily pierce the ice surface and improve the anti-slip effect.

High-score white carbon black formula design  
Improve tire grip in cold environments and ensure the safety performance of tires at low temperatures.

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	OA.diameter MM	Max Pressure kPa/Psi	RR	WG	SL
13'	165/70R13	79S	BSW	5.0	7.8	9.8	170	562	300/44	C	B	71
	175/70R13	82S	BLK	5.0	8.0	10.0	177	576	300/44	C	B	71
	175/65R14	82S	BLK	5.0	8.0	10.0	177	584	300/44	C	B	71
14'	175/70R14	84S	BLK	5.0	8.0	10.0	177	602	340/50	C	B	71
	185/60R14	82S	BLK	5.5	8.0	10.0	189	578	300/44	C	B	71
	185/65R14	86S	BLK	5.5	8.0	10.0	189	609	300/44	C	B	71
	185/70R14	88S	BLK	5.5	8.0	10.0	189	616	340/50	C	B	71
	185/55R15	82S	BLK	6.0	8.5	11.0	194	585	300/44	C	B	71
15'	185/60R15	84S	BLK	5.5	8.0	10.0	189	603	340/50	C	B	71
	185/65R15	88S	BLK	5.5	8.0	10.0	189	621	300/44	C	B	71
	195/50R15	82S	BLK	6.0	8.5	10.8	201	577	300/44	C	B	71
	195/55R15	85S	BLK	6.0	8.5	10.8	201	596	300/44	C	B	71
	195/60R15	88S	BLK	6.0	8.5	10.8	201	615	300/44	C	B	71
	195/65R15	91S	BLK/BSW	6.0/6	8.5/8.3	10.8/10.5	201/201	635/635	300/44 300/44	C	B	71
	205/60R15	91S	BLK	6.0/6	7.8	9.8	209	627	300/44	C	B	71
	205/65R15	94S	BLK	6.0	8.5	10.8	209	647	300/44	C	B	71
	205/70R15	96S	BLK	6.0/6	7.8	9.8	209	669	300/44	C	B	71
	185/55R16	83S	BLK	6.0	7.8	10.0	194	545	340/50	C	B	71
16'	195/55R16	87S	BLK	6.0	8.5	10.8	190	619	340/50	C	B	71
	205/55R16	91S	BSW/BLK	6.5/6.5	8.3/8.5	10.5/10.8	214/214	632/632	300/44 340/50	C	B	71
	225/55R16	95S	BLK	7.0	8.5	10.8	233	680	340/50	C	B	71
	195/60R16	89S	BLK	6.0	8.5	10.7	201	640	300/44	C	B	71
	205/60R16	92S	BLK	6.0	8.5	10.8	209	652	340/50	C	B	71
	215/55R16	93S	BLK	7.0	8.5	10.8	223	642	340/50	C	B	71
	215/60R16	95S	BLK	6.5	8.5	10.8	221	664	340/50	C	B	71
	215/65R16	98S	BLK	6.5	8.5	10.8	221	686	300/44	C	B	71
	215/70R16	100S	BLK	6.5	8.5	10.8	217	708	300/44	C	B	71
	225/70R16	107S	BLK	6.5	8.5	11.4	228	722	300/44	C	B	71
	235/70R16	106S	BLK	7.0	9.0	11.4	240	736	300/44	C	B	71
	215/45R17	87S	BLK	7.0	8.5	10.8	231	626	340/50	C	B	71
	215/50R17	91S	BLK	7.5	8.5	10.8	245	719	340/50	C	B	71
	215/60R17	96S	BLK	6.5	9.0	11.4	221	690	300/44	C	B	71
	225/45R17	91S	BLK	7.5	8.5	10.8	225	634	340/50	C	B	71
225/50R17	94S	BLK	8.0	8.5	10.8	265	739	340/50	C	B	71	
17'	215/55R17	94S	BLK	7.0	8.5	10.8	226	668	340/50	C	B	71
	225/55R17	97S	BLK	7.0	8.5	10.8	233	680	340/50	C	B	71
	235/55R17	99S	BLK	7.5	8.5	10.8	245	690	340/50	C	B	71
	225/60R17	99S	BLK	6.5	9.0	11.4	228	702	300/44	C	B	71
	225/65R17	102S	BLK	6.5	9.0	11.0	228	724	300/44	C	B	71
	235/65R17	108S	BLK	7.0	9.0	11.4	240	738	340/50	C	B	71
	245/45R17	95S	BLK	8.0	8.0	10.0	243	652	340/50	C	B	71
18'	265/65R17	112S	BLK	8.0	9.0	11.4	272	776	300/44	C	B	71
	285/65R17	116S	BLK	8.5	8.5	10.8	292	802	300/44	C	B	71
	185/75R16C	104/102R	BLK	5.0	9.5	12.0	184	684	475/69	C	B	71
	195/75R16C	107/105Q	BLK	5.5	9.5	12.0	196	698	475/69	C	B	71



# CERTIFICATES



# Tire Sidewall marketing descriptions



# PRODUCTION LINES



## Speed

Speed symbol indicates the maximum travel speed that the tire can achieve understated condition.

SS	Maximum Speed (km/h)
L	120
Q	160
S	180
T	190
H	210
V	240
W	270
Y	300
*ZR	over 240km/h

\* ZR means a wide range of speed

Maximum speed refers to the speed that the tire can achieve on flat road after normal installation.

## Loading Index

Load index refers to numeral value of tire's maximum load ability understated condition.

LI	loading capacity	LI	loading capacity	LI	loading capacity	LI	loading capacity
60	250	76	400	91	615	106	950
61	257	77	412	92	630	107	975
62	265	78	425	93	650	108	1000
63	272	79	437	94	670	109	1030
64	280	80	450	95	690	110	1060
65	290	81	462	96	710	111	1090
66	300	82	475	97	730	112	1120
67	307	83	487	98	750	113	1150
68	315	84	500	99	775	114	1180
69	325	85	513	100	800	115	1215
70	335	86	530	101	825	116	1250
71	345	87	545	102	850	117	1285
72	355	88	560	103	875	118	1320
73	365	89	580	104	900	119	1360
74	375	90	600	105	925	120	1400
75	387						